



Website



ZHONGSHAN XILE OPTOELECTRONIC TECHNOLOGY CO.,LTD.

+86 760-22382762

xierle@foxmail.com

+86 18948897724 (whatsapp)
+86 15813136833 (whatsapp)

5th-7th Floor, 5#Building, Yueshen Bay Area Wisdom Valley,
No.18 Mincheng East Road, Xiaolan Town, Zhongshan City,
Guangdong Province, China



2024
(1st Edition)



COMPANY PROFILE

Zhongshan Xile Optoelectronic Technology Co., Ltd. is located in Xiaolan Town, Zhongshan City. The company was established in 2013. It is a comprehensive modern LED lighting enterprise integrating product development, production and sales.

The company's standardized production workshop covers an area of more than 10,000 square meters, equipped with modern production equipment and testing equipment, and has a professional management team. It insists on the quality management of products from details. It has obtained ISO9001:2015 quality system certification in 2021, and has become a national high-tech enterprise.

Relying on professional quality, attentive service and humanized management, we have won customer satisfaction with good reputation and excellent service. Corporate values: create value for customers and create opportunities for employees.

Business philosophy: customer-centric, striver-oriented, and continuous innovation.




Factory



Workshop



Machine



Showroom



Certificates




Transportation

Star & Moon Panel Light

Single CCT

Warm White / Nature White / Pure White

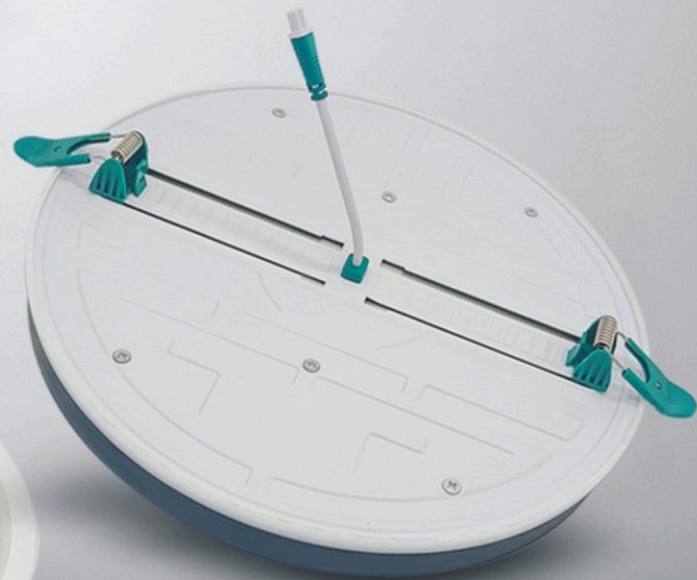


• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-10	10W	Φ100*16	70	WW/NW/PW	SMD2835*63	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLSMR-24	24W	Φ170*18	70	WW/NW/PW	SMD2835*144	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLSMR-36	36W	Φ220*18	70	WW/NW/PW	SMD2835*255	Φ50-190	100	0.5	AC85-265V(AC175-265V)
XLSMR-48	48W	Φ300*18	70	WW/NW/PW	SMD2835*288	Φ50-206	100	0.5	AC85-265V(AC175-265V)

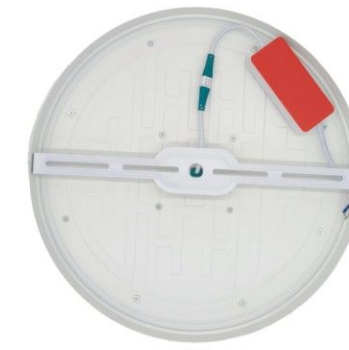

• Optional outer ring shell color




ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-24	24W	Φ170*42	70	WW/NW/PW	SMD2835*144	100	0.5	AC85-265V(AC175-265V)
XLSMR-36	36W	Φ220*42	70	WW/NW/PW	SMD2835*255	100	0.5	AC85-265V(AC175-265V)
XLSMR-48	48W	Φ300*42	70	WW/NW/PW	SMD2835*288	100	0.5	AC85-265V(AC175-265V)

Star & Moon Panel Light

3 CCT
CCT can be changed by
Power switch

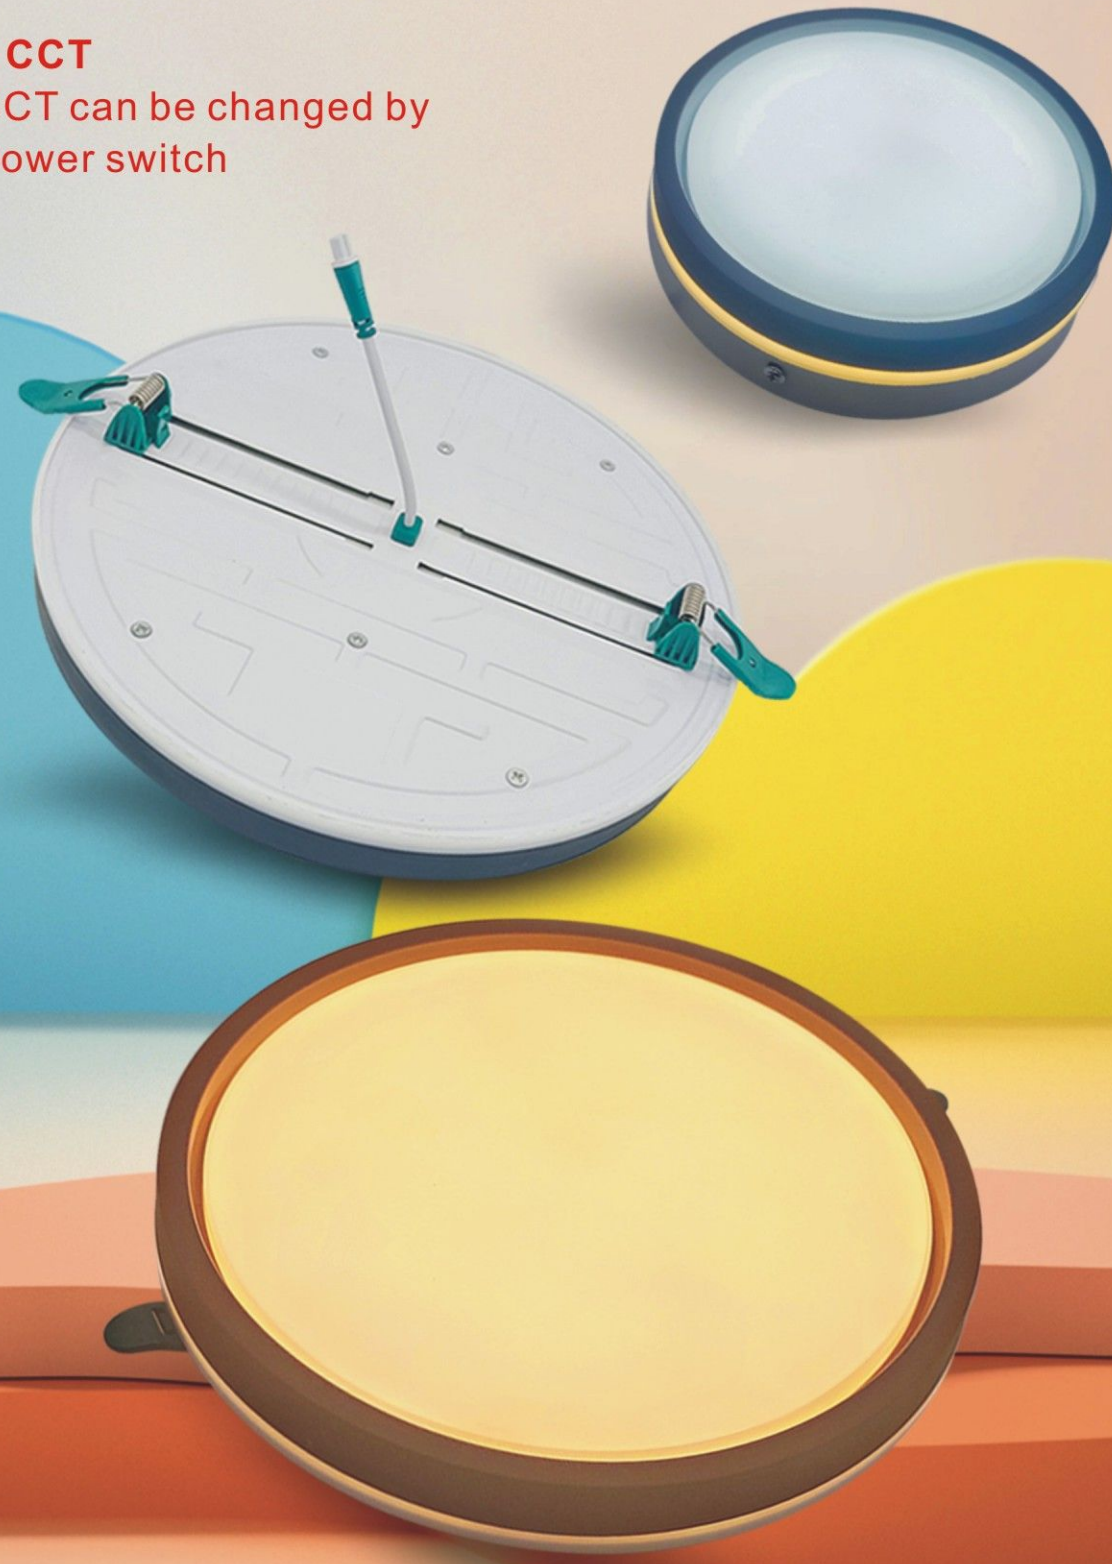

• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	3 CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-10d	10W	Φ100*16	70	WW-NW-PW	SMD2835*100	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLSMR-24d	24W	Φ170*18	70	WW-NW-PW	SMD2835*288	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLSMR-36d	36W	Φ220*18	70	WW-NW-PW	SMD2835*420	Φ50-190	100	0.5	AC85-265V(AC175-265V)
XLSMR-48d	48W	Φ300*18	70	WW-NW-PW	SMD2835*576	Φ50-206	100	0.5	AC85-265V(AC175-265V)



• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-24d	24W	Φ170*42	70	WW-NW-PW	SMD2835*288	100	0.5	AC85-265V(AC175-265V)
XLSMR-36d	36W	Φ220*42	70	WW-NW-PW	SMD2835*420	100	0.5	AC85-265V(AC175-265V)
XLSMR-48d	48W	Φ300*42	70	WW-NW-PW	SMD2835*576	100	0.5	AC85-265V(AC175-265V)

Star & Moon Panel Light

Side Color
PW+WW/NW or PW+R/G/B




• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-10+10	10+10W	Φ100*16	70	PW+WW/NW PW+R/G/B	SMD2835*80	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLSMR-24+24	24+24W	Φ170*18	70	PW+WW/NW PW+R/G/B	SMD2835*180	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLSMR-36+36	36+36W	Φ220*18	70	PW+WW/NW PW+R/G/B	SMD2835*255	Φ50-190	100	0.5	AC85-265V(AC175-265V)
XLSMR-42+42	42+42W	Φ300*18	70	PW+WW/NW PW+R/G/B	SMD2835*312	Φ50-206	100	0.5	AC85-265V(AC175-265V)

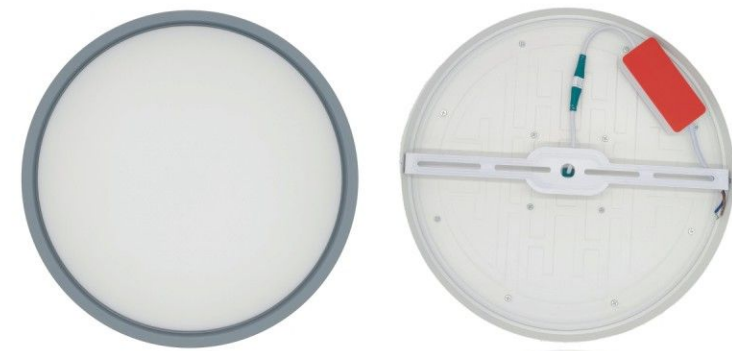

• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-24+24	24+24W	Φ170*42	70	PW+WW/NW PW+R/G/B	SMD2835*180	100	0.5	AC85-265V(AC175-265V)
XLSMR-36+36	36+36W	Φ220*42	70	PW+WW/NW PW+R/G/B	SMD2835*255	100	0.5	AC85-265V(AC175-265V)
XLSMR-42+42	42+42W	Φ300*42	70	PW+WW/NW PW+R/G/B	SMD2835*312	100	0.5	AC85-265V(AC175-265V)

Star & Moon Panel Light

RGB

Dimmable with Infrared remote control



• Optional outer ring shell color



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-6+3	6+3W	Φ100*16	70	RGB	SMD2835*60	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLSMR-12+4	12+4W	Φ170*18	70	RGB	SMD2835*144	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLSMR-18+6	18+6W	Φ220*18	70	RGB	SMD2835*192	Φ50-190	100	0.5	AC85-265V(AC175-265V)



• Optional outer ring shell color




ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLSMR-12+4	12+4W	Φ170*42	70	RGB	SMD2835*144	100	0.5	AC85-265V(AC175-265V)
XLSMR-18+6	18+6W	Φ220*42	70	RGB	SMD2835*192	100	0.5	AC85-265V(AC175-265V)


Ares Panel Light

Single CCT

Warm White / Nature White / Pure White

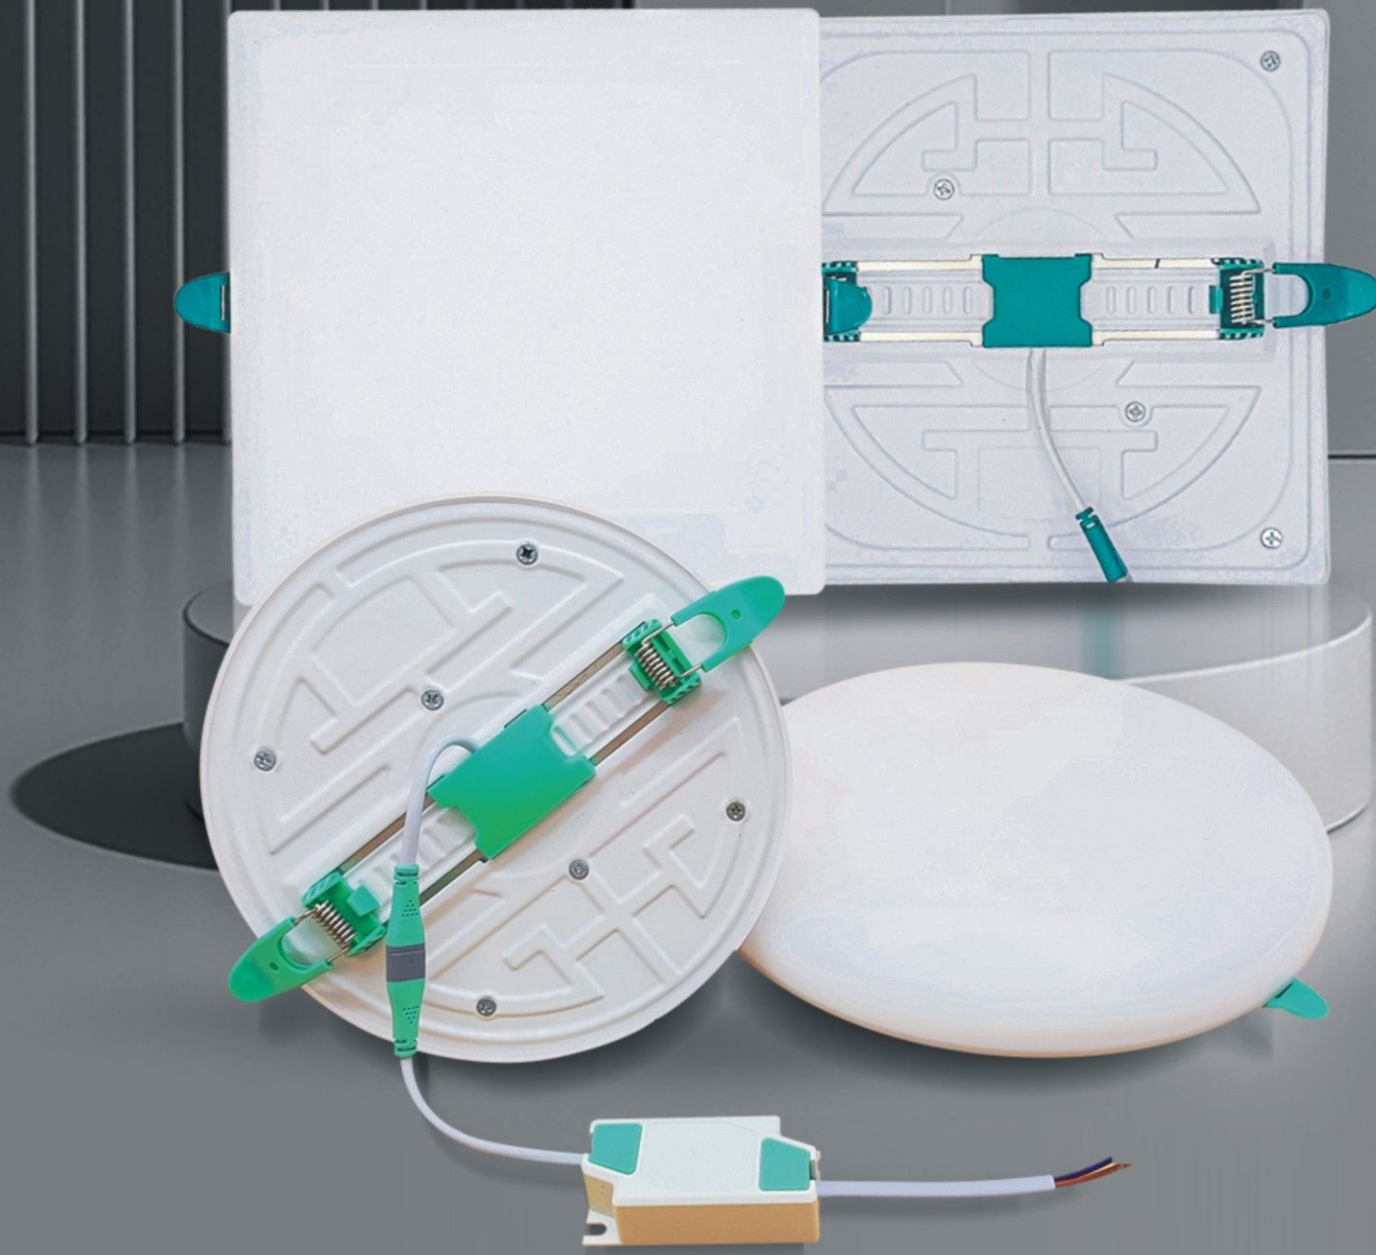


ROUND

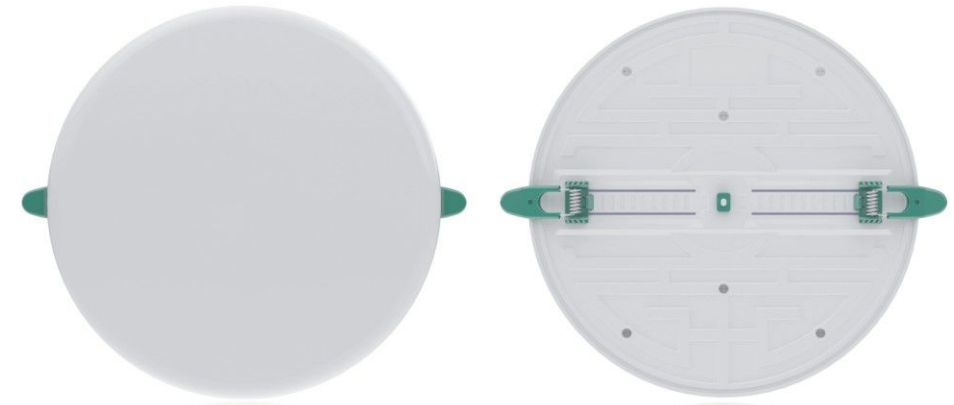

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-10	10W	Φ100*16	70	WW/NW/PW	SMD2835*63	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLPWR-18	18W	Φ120*16	70	WW/NW/PW	SMD2835*96	Φ50-95	100	0.5	AC85-265V(AC175-265V)
XLPWR-24	24W	Φ170*18	70	WW/NW/PW	SMD2835*144	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLPWR-36	36W	Φ220*18	70	WW/NW/PW	SMD2835*255	Φ50-190	100	0.5	AC85-265V(AC175-265V)
XLPWR-48	48W	Φ300*18	70	WW/NW/PW	SMD2835*288	Φ50-206	100	0.5	AC85-265V(AC175-265V)

SQUARE

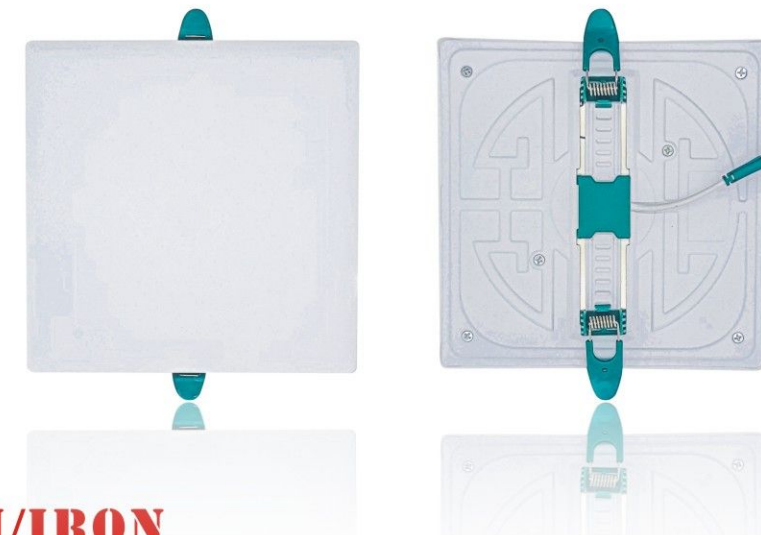

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPWS-10	10W	100*100*16	70	WW/NW/PW	SMD2835*66	50-70	100	0.5	AC85-265V(AC175-265V)
XLPWS-18	18W	120*120*16	70	WW/NW/PW	SMD2835*96	50-95	100	0.5	AC85-265V(AC175-265V)
XLPWS-24	24W	170*170*18	70	WW/NW/PW	SMD2835*168	50-140	100	0.5	AC85-265V(AC175-265V)
XLPWS-36	36W	220*220*18	70	WW/NW/PW	SMD2835*289	50-190	100	0.5	AC85-265V(AC175-265V)
XLPWS-48	48W	300*300*18	70	WW/NW/PW	SMD2835*336	50-206	100	0.5	AC85-265V(AC175-265V)


Ares Panel Light

3 CCT

CCT can be changed by slide switch




ROUND

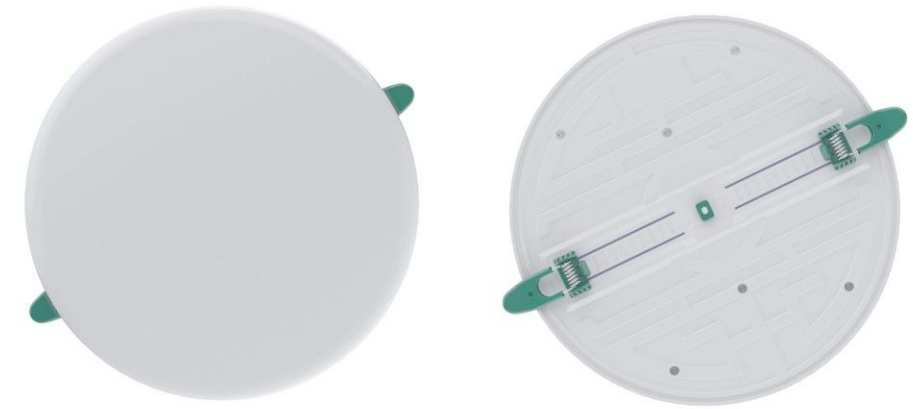

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	3 CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-10d	10W	Φ100*16	70	WW-NW-PW	SMD2835*100	Φ50-70	100	0.5	AC85-265V(AC175-265V)
XLPWR-18d	18W	Φ120*16	70	WW-NW-PW	SMD2835*168	Φ50-95	100	0.5	AC85-265V(AC175-265V)
XLPWR-24d	24W	Φ170*18	70	WW-NW-PW	SMD2835*288	Φ50-140	100	0.5	AC85-265V(AC175-265V)
XLPWR-36d	36W	Φ220*18	70	WW-NW-PW	SMD2835*420	Φ50-190	100	0.5	AC85-265V(AC175-265V)
XLPWR-48d	48W	Φ300*18	70	WW-NW-PW	SMD2835*576	Φ50-206	100	0.5	AC85-265V(AC175-265V)

SQUARE

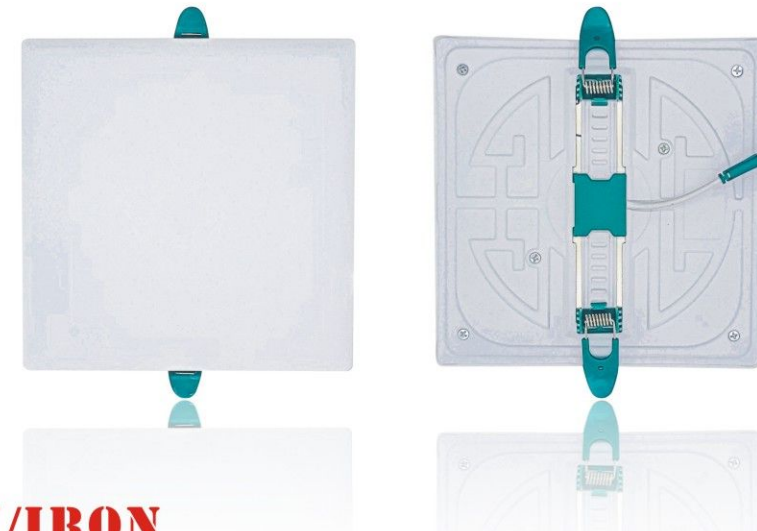


ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	3 CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPWS-10d	10W	100*100*16	70	WW-NW-PW	SMD2835*132	50-70	100	0.5	AC85-265V(AC175-265V)
XLPWS-18d	18W	120*120*16	70	WW-NW-PW	SMD2835*192	50-95	100	0.5	AC85-265V(AC175-265V)
XLPWS-24d	24W	170*170*18	70	WW-NW-PW	SMD2835*336	50-140	100	0.5	AC85-265V(AC175-265V)
XLPWS-36d	36W	220*220*18	70	WW-NW-PW	SMD2835*578	50-190	100	0.5	AC85-265V(AC175-265V)
XLPWS-48d	48W	300*300*18	70	WW-NW-PW	SMD2835*672	50-206	100	0.5	AC85-265V(AC175-265V)

Ares Panel Light

Single CCT

Warm White / Nature White / Pure White

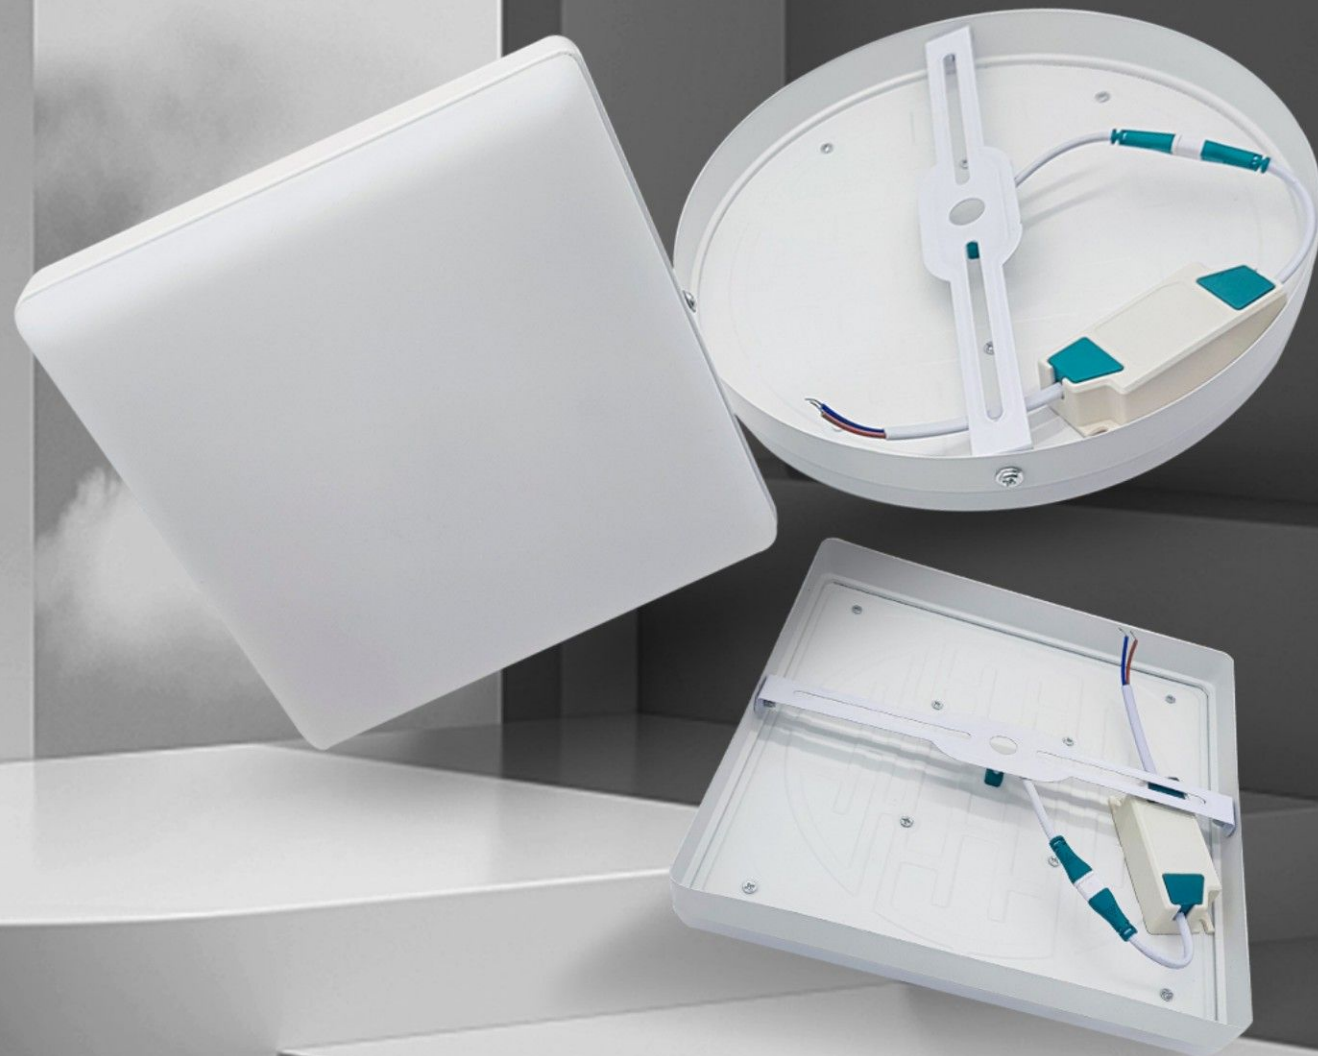

ROUND



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-18	18W	Φ120*42	70	WW/NW/PW	SMD2835*96	100	0.5	AC85-265V(AC175-265V)
XLPWR-24	24W	Φ170*42	70	WW/NW/PW	SMD2835*144	100	0.5	AC85-265V(AC175-265V)
XLPWR-36	36W	Φ220*42	70	WW/NW/PW	SMD2835*255	100	0.5	AC85-265V(AC175-265V)
XLPWR-48	48W	Φ300*42	70	WW/NW/PW	SMD2835*288	100	0.5	AC85-265V(AC175-265V)

SQUARE



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	Single CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-18	18W	120*120*42	70	WW/NW/PW	SMD2835*96	100	0.5	AC85-265V(AC175-265V)
XLPWR-24	24W	170*170*42	70	WW/NW/PW	SMD2835*168	100	0.5	AC85-265V(AC175-265V)
XLPWR-36	36W	220*220*42	70	WW/NW/PW	SMD2835*289	100	0.5	AC85-265V(AC175-265V)
XLPWR-48	48W	300*300*42	70	WW/NW/PW	SMD2835*336	100	0.5	AC85-265V(AC175-265V)

Ares Panel Light

3CCT
CCT can be changed by slide switch



ROUND



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	3 CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-18d	18W	Φ120*42	70	WW-NW-PW	SMD2835*168	100	0.5	AC85-265V(AC175-265V)
XLPWR-24d	24W	Φ170*42	70	WW-NW-PW	SMD2835*288	100	0.5	AC85-265V(AC175-265V)
XLPWR-36d	36W	Φ220*42	70	WW-NW-PW	SMD2835*420	100	0.5	AC85-265V(AC175-265V)
XLPWR-48d	48W	Φ300*42	70	WW-NW-PW	SMD2835*576	100	0.5	AC85-265V(AC175-265V)

SQUARE



ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	3 CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPWR-18d	18W	120*120*42	70	WW-NW-PW	SMD2835*192	100	0.5	AC85-265V(AC175-265V)
XLPWR-24d	24W	170*170*42	70	WW-NW-PW	SMD2835*336	100	0.5	AC85-265V(AC175-265V)
XLPWR-36d	36W	220*220*42	70	WW-NW-PW	SMD2835*578	100	0.5	AC85-265V(AC175-265V)
XLPWR-48d	48W	300*300*42	70	WW-NW-PW	SMD2835*672	100	0.5	AC85-265V(AC175-265V)

Artemis
Plastic Dob Downlight

Microwave




Two-color



3000K 4000K 6500K

DOB

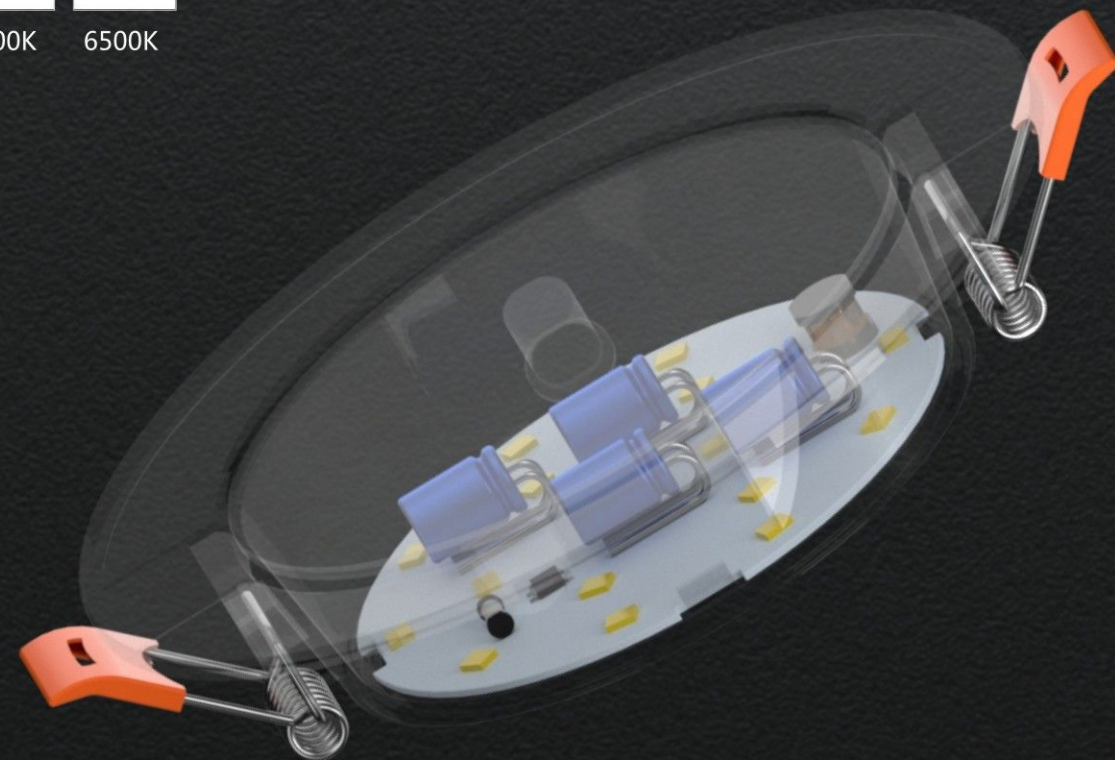

ARTEMIS

PLASTIC DOB DOWNLIGHT

RECESSED

4W/6W/9W/15W/20W



RECESSED

6W/9W/15W/20W



SURFACE


15W/20W/36W





SURFACE

15W/20W/36W



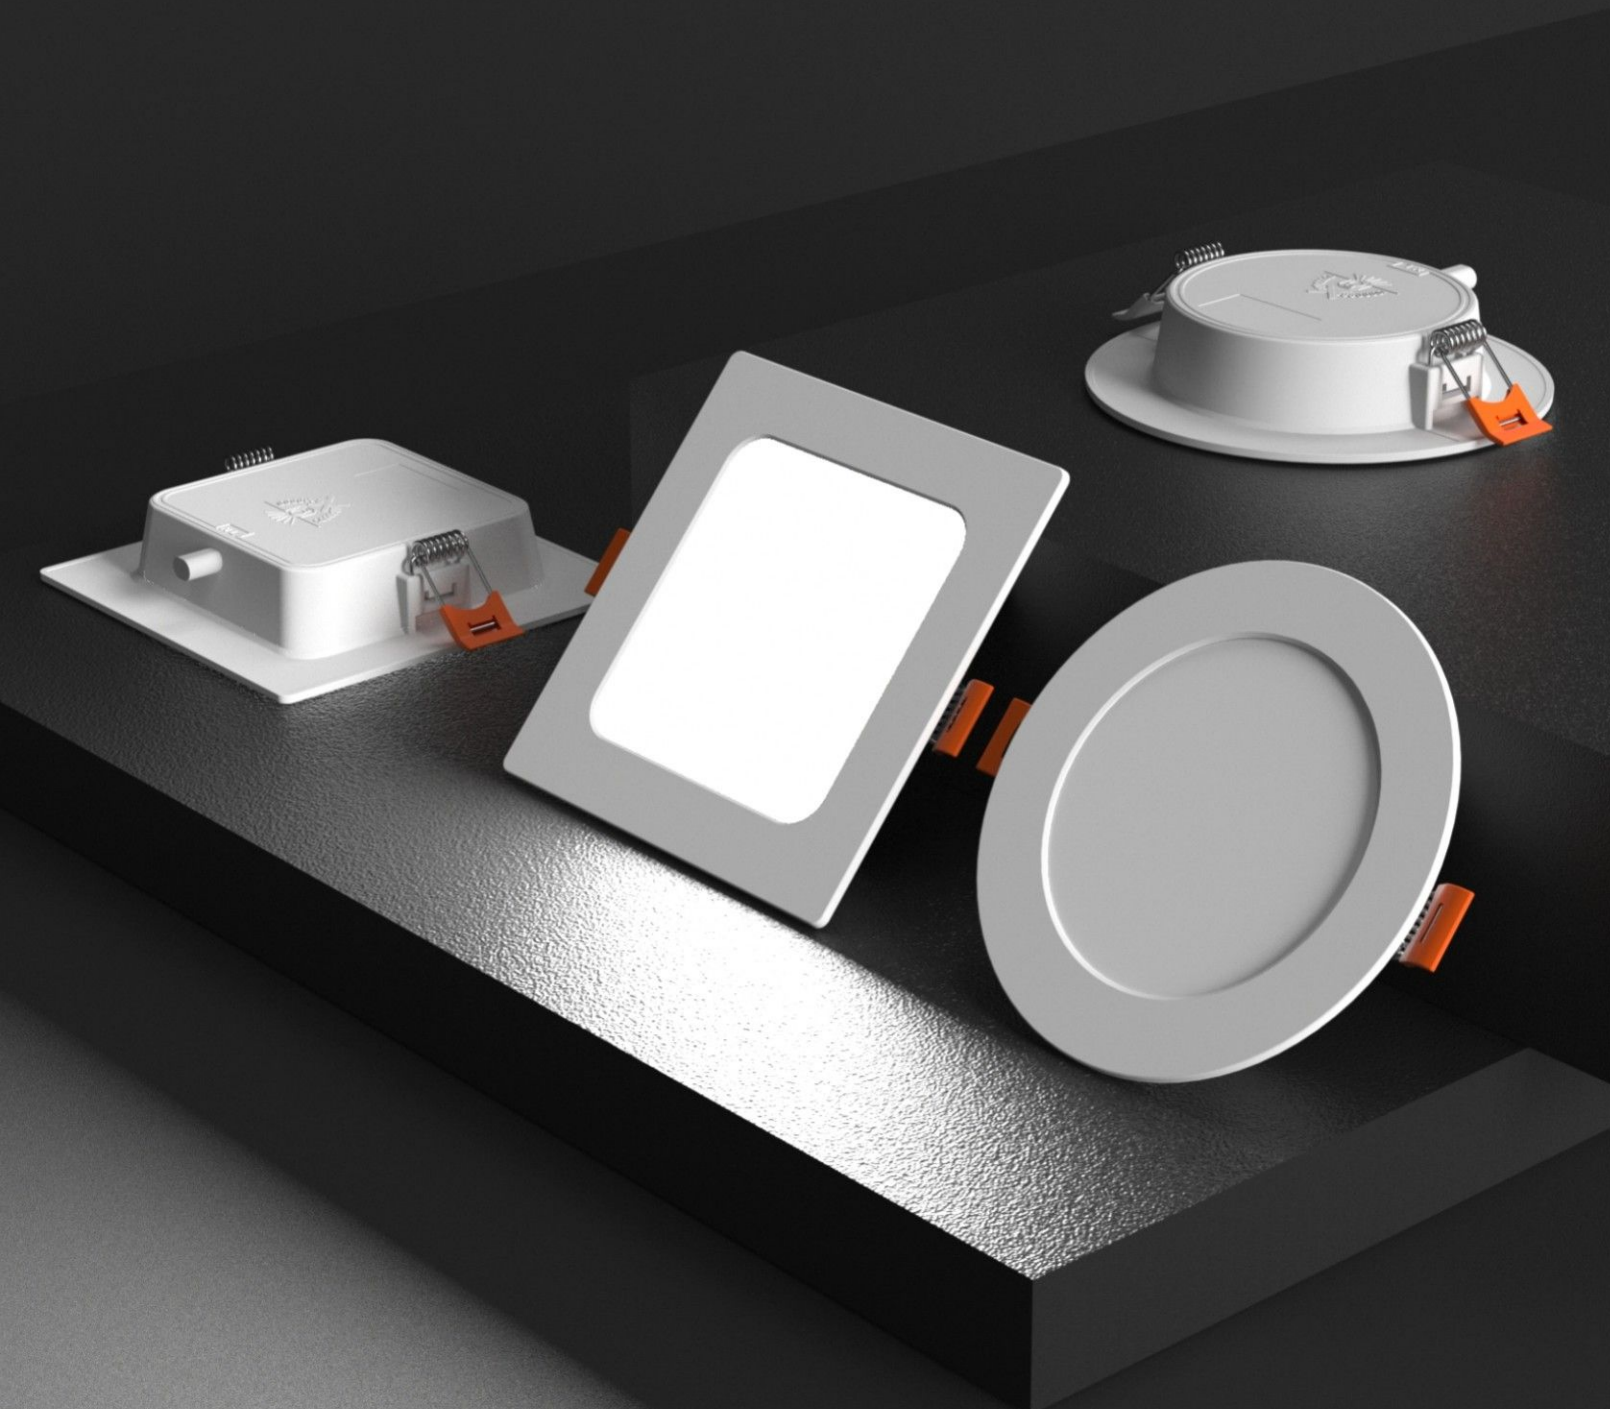



ROUND

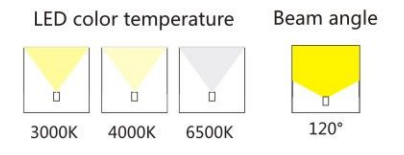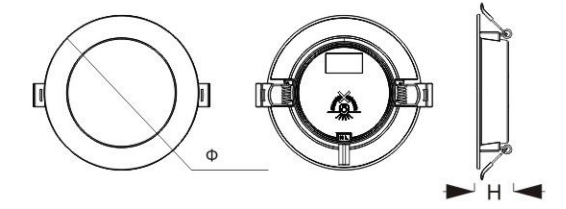

PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPDR-4	4W	Φ95*24	70/80	3000K/4000K/6500K	SMD2835*11	75	80	0.5	AC85-265V(AC175-265V)
XLPDR-6	6W	Φ120*25	70/80	3000K/4000K/6500K	SMD2835*21	95	80	0.5	AC85-265V(AC175-265V)
XLPDR-9	9W	Φ140*25	70/80	3000K/4000K/6500K	SMD2835*28	115	80	0.5	AC85-265V(AC175-265V)
XLPDR-15	15W	Φ170*26	70/80	3000K/4000K/6500K	SMD2835*48	140	80	0.5	AC85-265V(AC175-265V)
XLPDR-20	20W	Φ220*27	70/80	3000K/4000K/6500K	SMD2835*70	185	80	0.5	AC85-265V(AC175-265V)


SQUARE

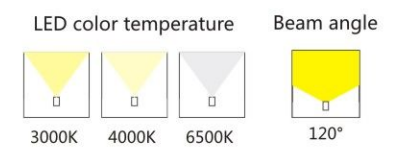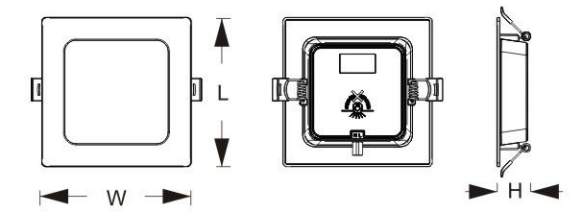



PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPDS-6	6W	115*115*25	70/80	3000K/4000K/6500K	SMD2835*24	90	80	0.5	AC85-265V(AC175-265V)
XLPDS-9	9W	145*145*25	70/80	3000K/4000K/6500K	SMD2835*30	120	80	0.5	AC85-265V(AC175-265V)
XLPDS-15	15W	165*165*26	70/80	3000K/4000K/6500K	SMD2835*56	140	80	0.5	AC85-265V(AC175-265V)
XLPDS-20	20W	220*220*27	70/80	3000K/4000K/6500K	SMD2835*90	185	80	0.5	AC85-265V(AC175-265V)

SURFACE

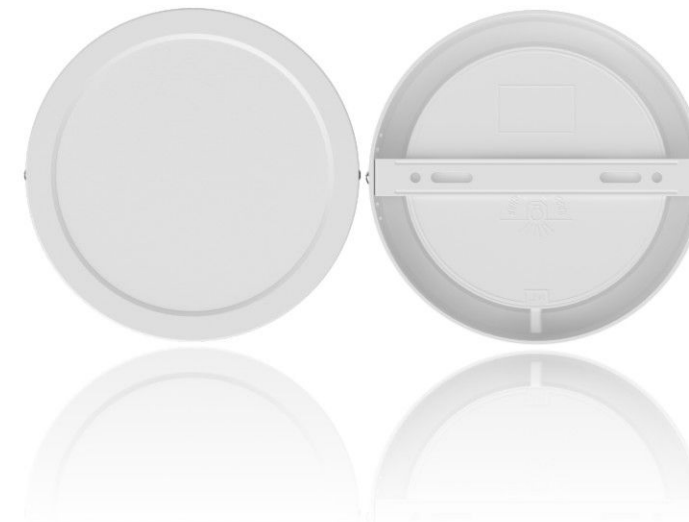

ROUND

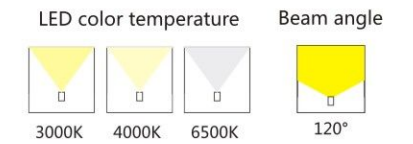
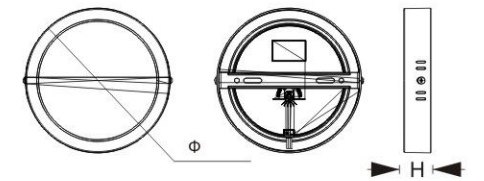


PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPDR-15	15W	Φ160*26	70/80	3000K/4000K/6500K	SMD2835*48	80	0.5	AC85-265V(AC175-265V)
XLPDR-20	20W	Φ200*27	70/80	3000K/4000K/6500K	SMD2835*70	80	0.5	AC85-265V(AC175-265V)
XLPDR-36	36W	Φ280*27	70/80	3000K/4000K/6500K	SMD2835*130	80	0.5	AC85-265V(AC175-265V)



SQUARE

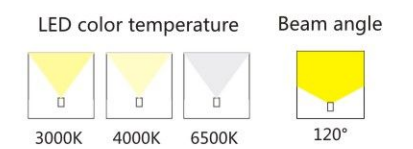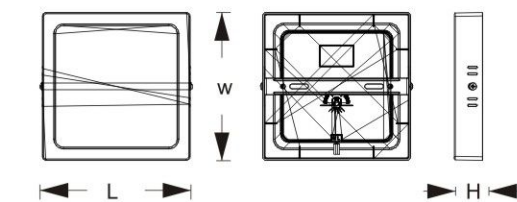

PLASTIC


MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPS-15	15W	160*160*26	70/80	3000K/4000K/6500K	SMD2835*56	80	0.5	AC85-265V(AC175-265V)
XLPS-20	20W	200*200*27	70/80	3000K/4000K/6500K	SMD2835*90	80	0.5	AC85-265V(AC175-265V)
XLPS-36	36W	280*280*27	70/80	3000K/4000K/6500K	SMD2835*145	80	0.5	AC85-265V(AC175-265V)

PLANET

PLASTIC PANEL LIGHT


XLPTR

8W/12W/20W/30W

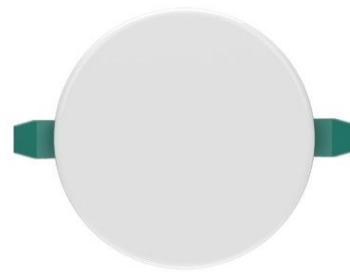

XLPTS


18W/26W



Ultra-Slim Design




Optional with external driver

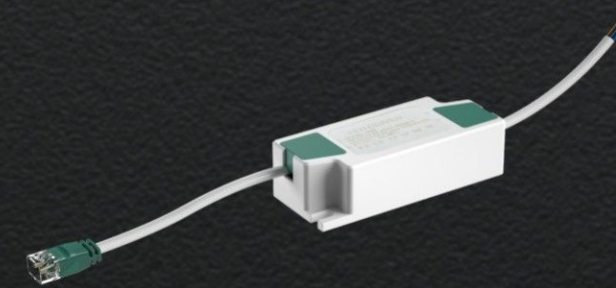


External driver

Adjustable Cutout

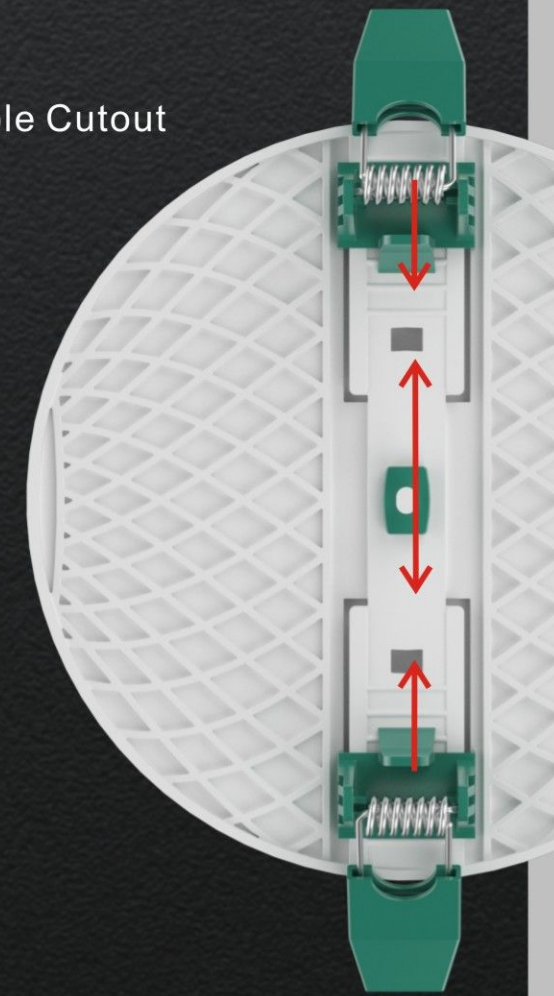


Recessed

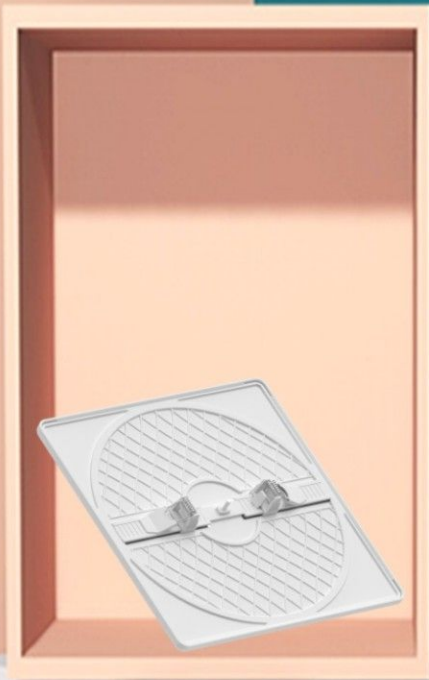

Planet
Edge-lit


ROUND

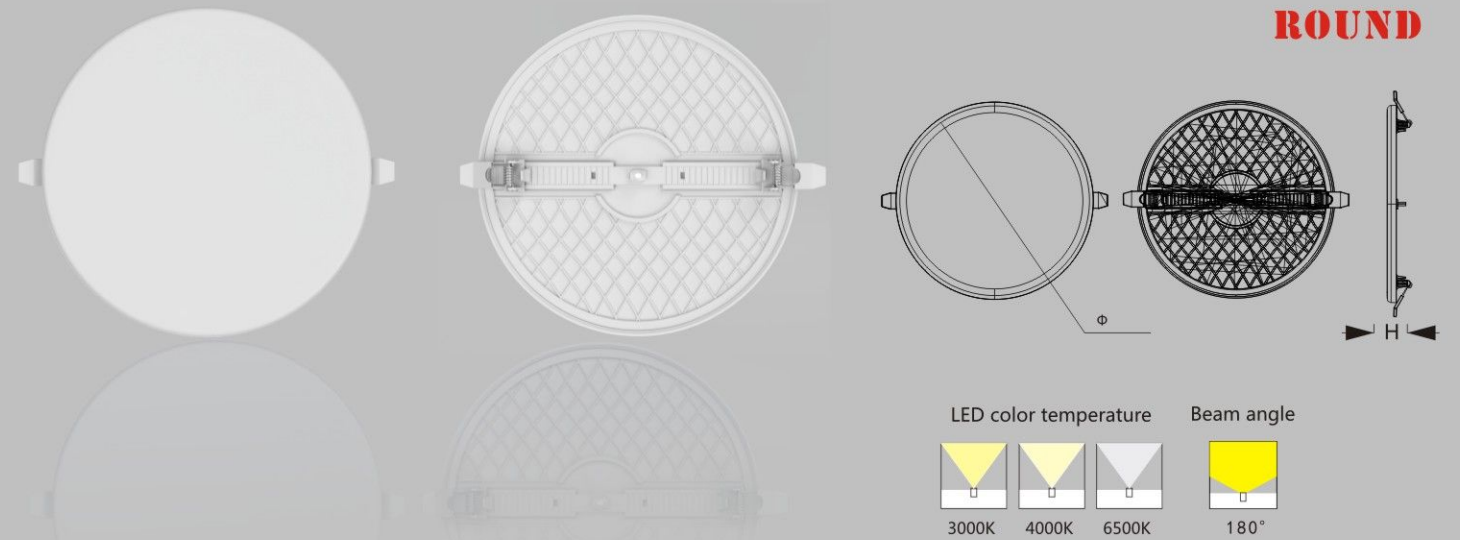

PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPCR-8	8W	Φ95*8	70/80	3000K/4000K/6500K	SMD2835*46	40-80	90	0.5/0.9	AC85-265V(AC175-265V)
XLPCR-12	12W	Φ115*8	70/80	3000K/4000K/6500K	SMD2835*66	65-100	90	0.5/0.9	AC85-265V(AC175-265V)
XLPCR-20	20W	Φ165*8	70/80	3000K/4000K/6500K	SMD2835*100	65-145	100	0.5/0.9	AC85-265V(AC175-265V)
XLPCR-30	30W	Φ220*8	70/80	3000K/4000K/6500K	SMD2835*120	70-200	100	0.5/0.9	AC85-265V(AC175-265V)

SQUARE

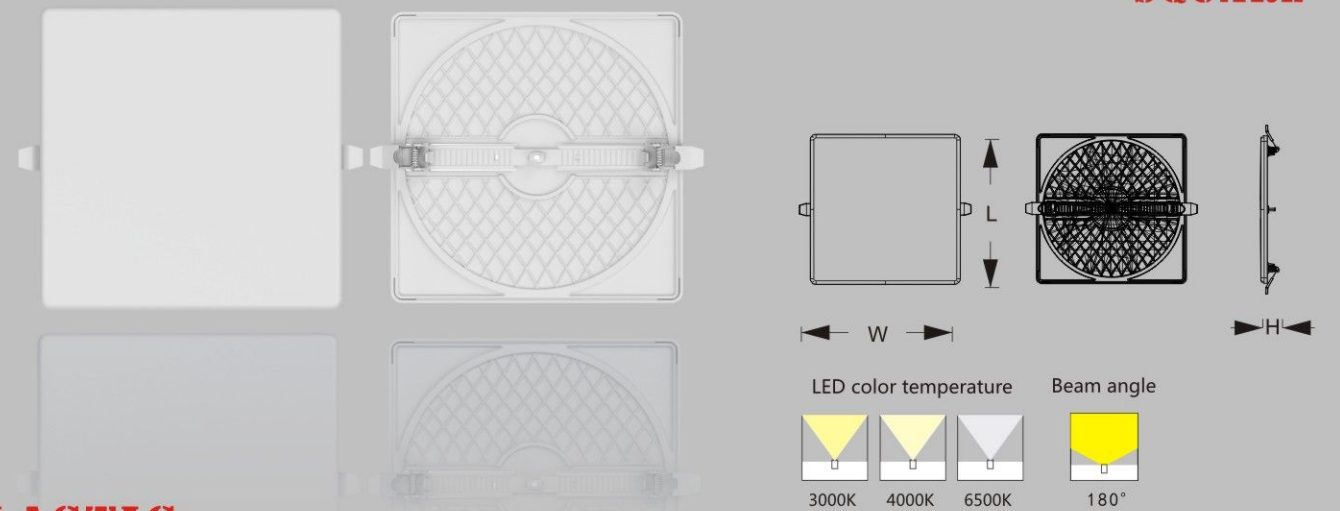

PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPCS-12	12W	115*115*8	70/80	3000K/4000K/6500K	SMD2835*96	65-100	100	0.5/0.9	AC85-265V(AC175-265V)
XLPCS-20	20W	165*165*8	70/80	3000K/4000K/6500K	SMD2835*120	65-145	100	0.5/0.9	AC85-265V(AC175-265V)
XLPCS-30	30W	220*220*8	70/80	3000K/4000K/6500K	SMD2835*156	70-200	100	0.5/0.9	AC85-265V(AC175-265V)




ROUND



PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPTR-8	8W	Φ95*10	70/80	3000K/4000K/6500K	SMD2835*46	60-90	90	0.5/0.9	AC85-265V(AC175-265V)
XLPTR-12	12W	Φ120*10	70/80	3000K/4000K/6500K	SMD2835*66	60-105	90	0.5/0.9	AC85-265V(AC175-265V)
XLPTR-20	20W	Φ170*10	70/80	3000K/4000K/6500K	SMD2835*100	60-155	100	0.5/0.9	AC85-265V(AC175-265V)
XLPTR-30	30W	Φ220*10	70/80	3000K/4000K/6500K	SMD2835*120	65-200	100	0.5/0.9	AC85-265V(AC175-265V)

SQUARE

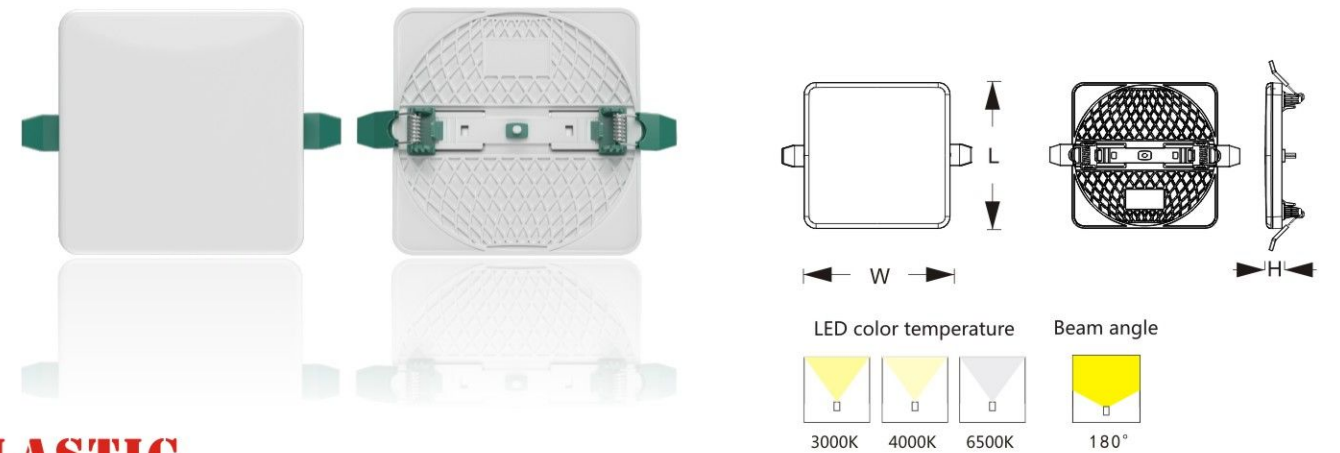

PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLPTS-20	20W	170*170*10	70/80	3000K/4000K/6500K	SMD2835*110	60-155	100	0.5/0.9	AC85-265V(AC175-265V)
XLPTS-30	30W	220*220*10	70/80	3000K/4000K/6500K	SMD2835*130	65-200	100	0.5/0.9	AC85-265V(AC175-265V)


BEE

BACKLIT PANEL LIGHT

RECESSED
10W/15W/22W/32W



RECESSED
22W/32W/

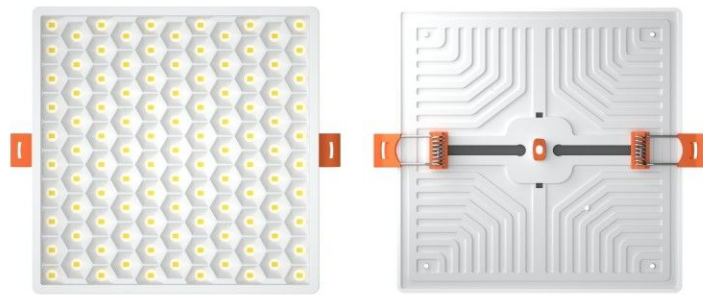


SURFACE
15W/22W/32W



SURFACE
22W/32W



B_{ee}
Backlit Panel Light

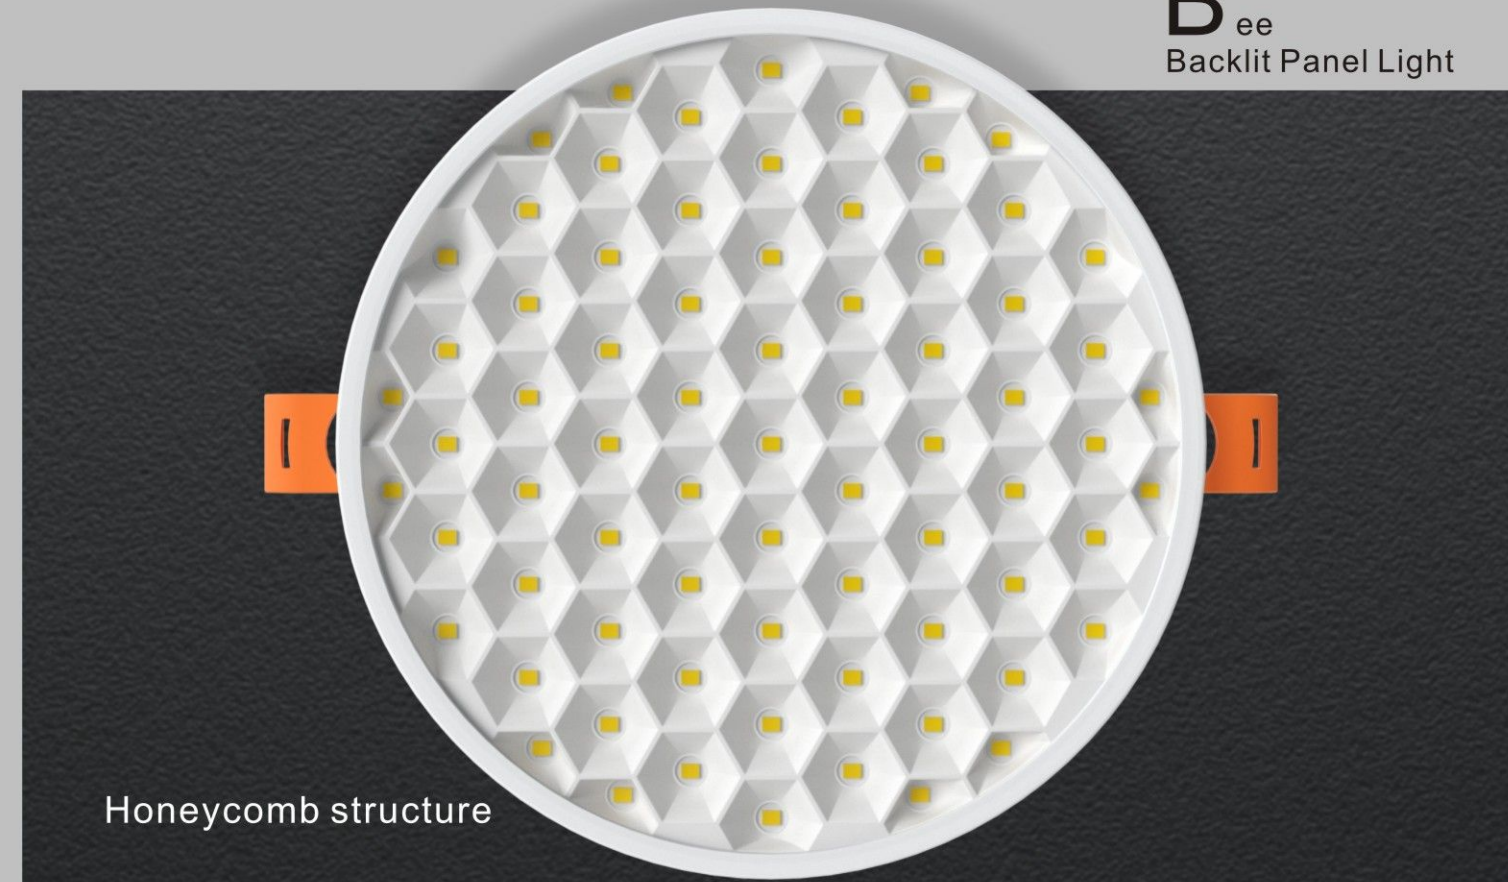



Honeycomb structure

Two-color




Adjustable cutout

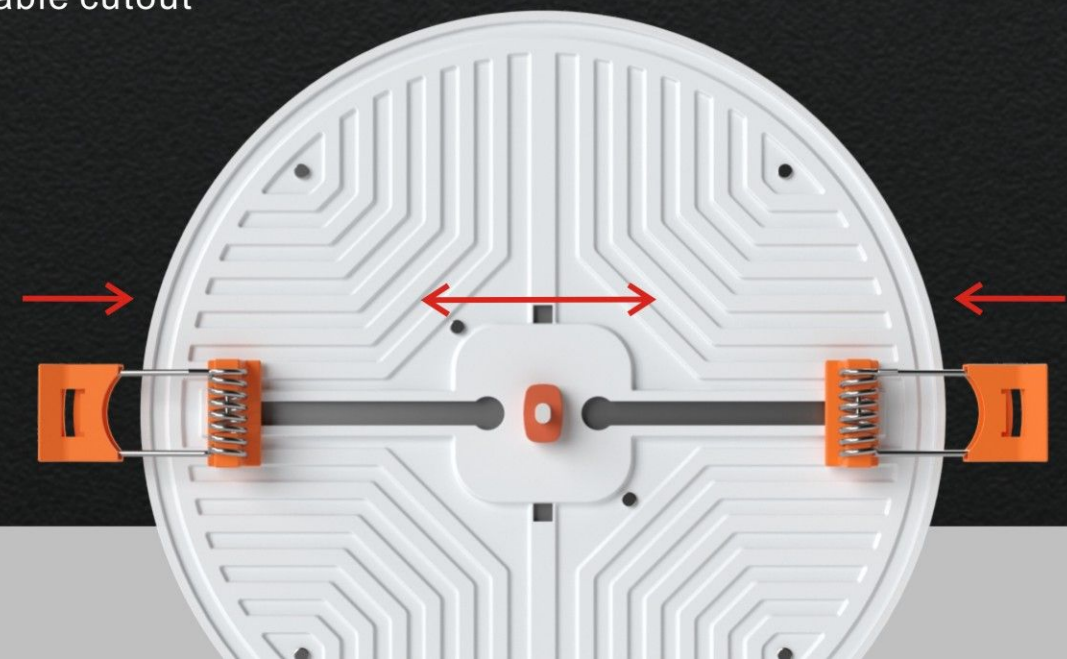

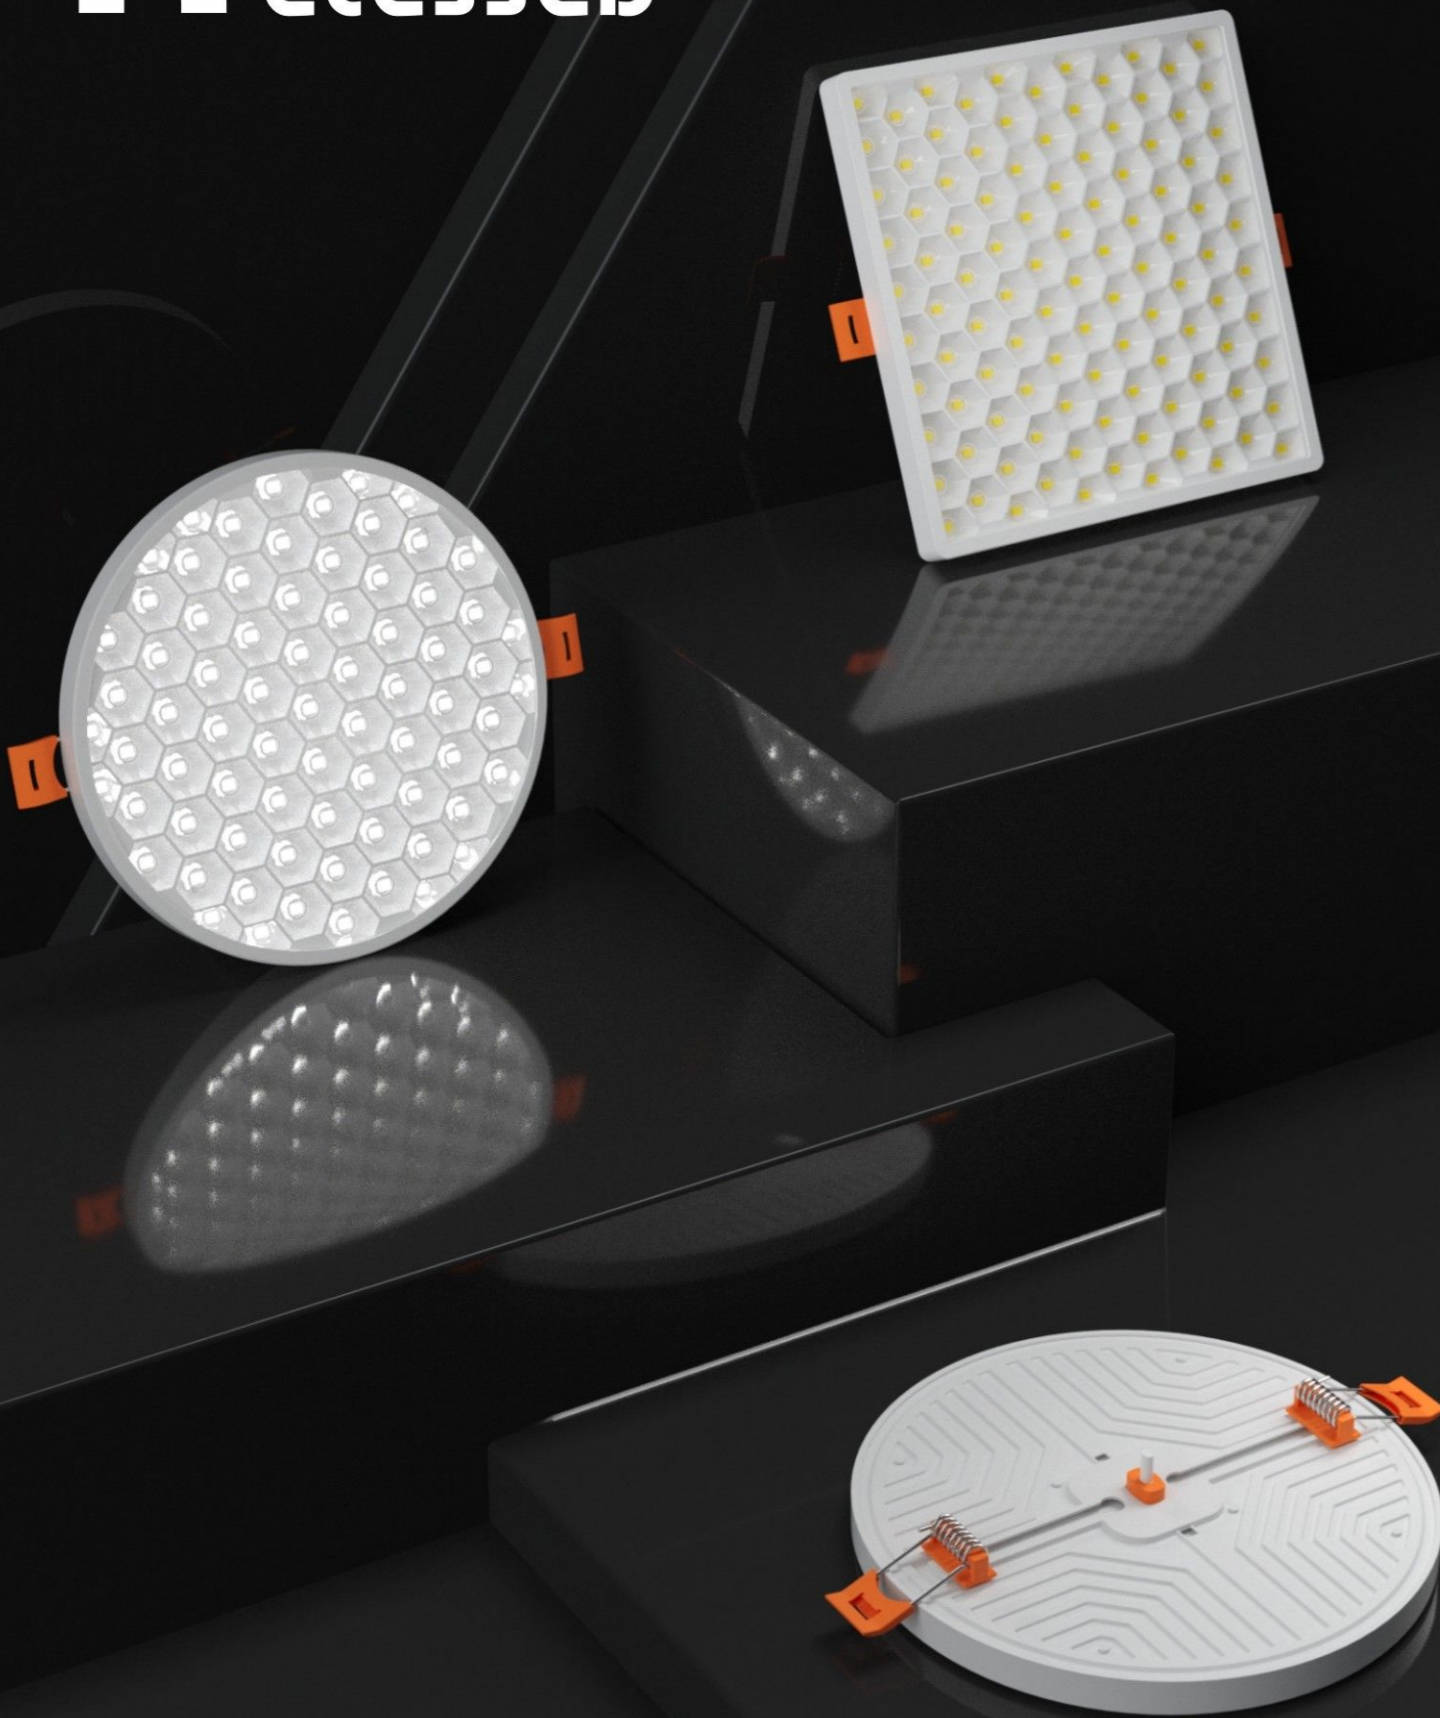


ROUND

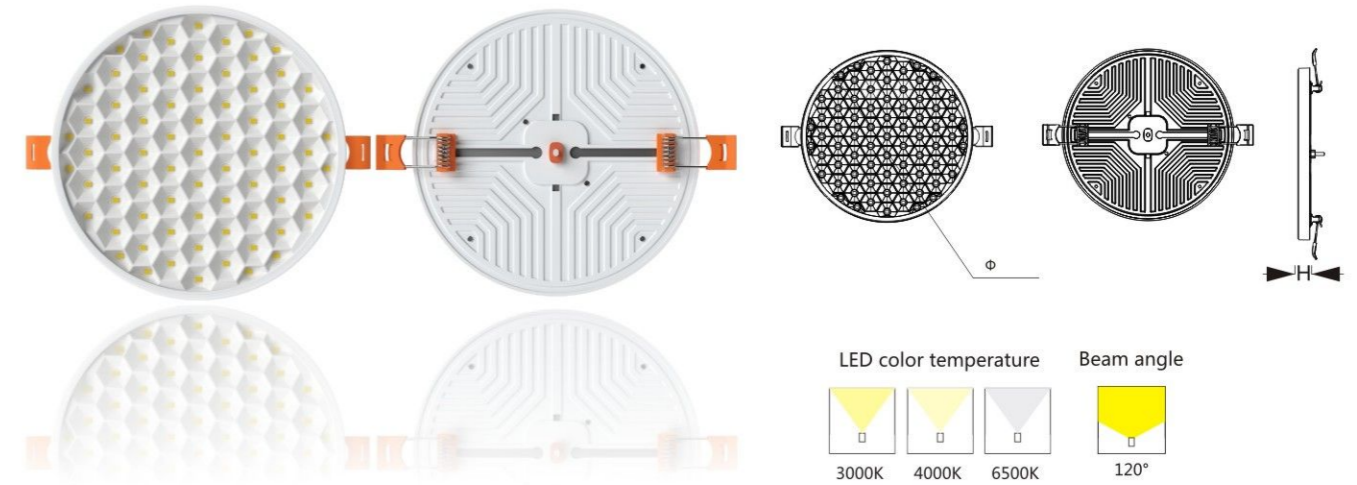

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLBRR-10	10W	Φ100*10	70/80	3000K/4000K/6500K	SMD2835*31	50-70	100	0.5/0.9	AC85-265V(AC175-265V)
XLBRR-15	15W	Φ120*10	70/80	3000K/4000K/6500K	SMD2835*55	50-90	100	0.5/0.9	AC85-265V(AC175-265V)
XLBRR-22	22W	Φ170*10	70/80	3000K/4000K/6500K	SMD2835*73	50-135	100	0.5/0.9	AC85-265V(AC175-265V)
XLBRR-32	32W	Φ220*10	70/80	3000K/4000K/6500K	SMD2835*109	50-185	100	0.5/0.9	AC85-265V(AC175-265V)

SQUARE

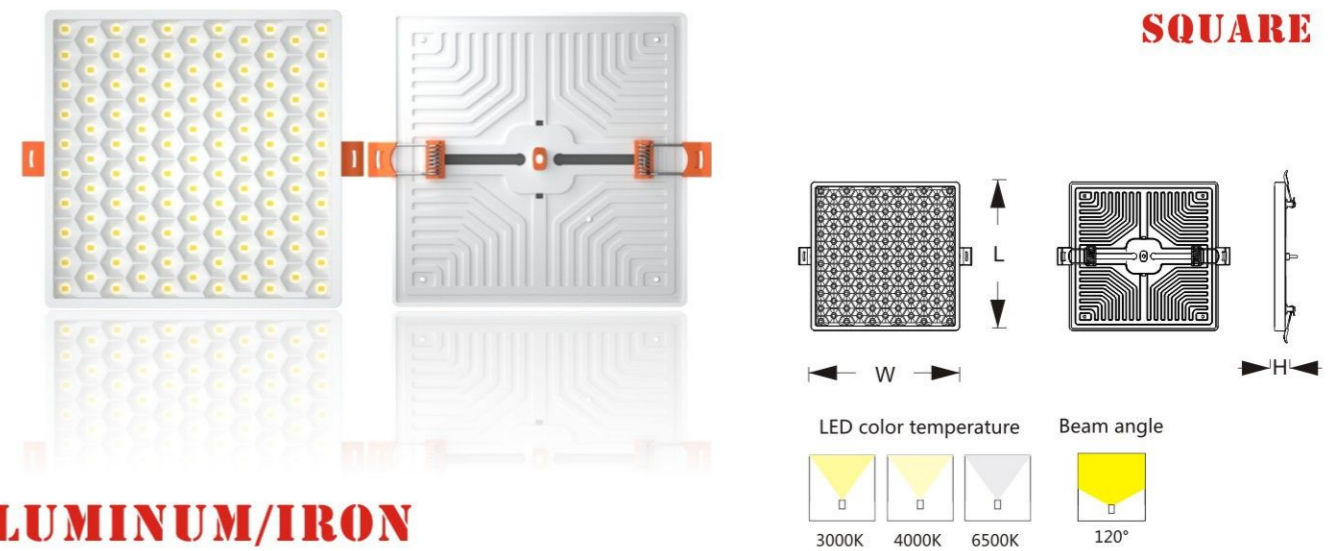


ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLBRS-22	22W	170*170*10	70/80	3000K/4000K/6500K	SMD2835*105	50-135	100	0.5/0.9	AC85-265V(AC175-265V)
XLBRS-32	32W	220*220*10	70/80	3000K/4000K/6500K	SMD2835*149	50-185	100	0.5/0.9	AC85-265V(AC175-265V)




ROUND

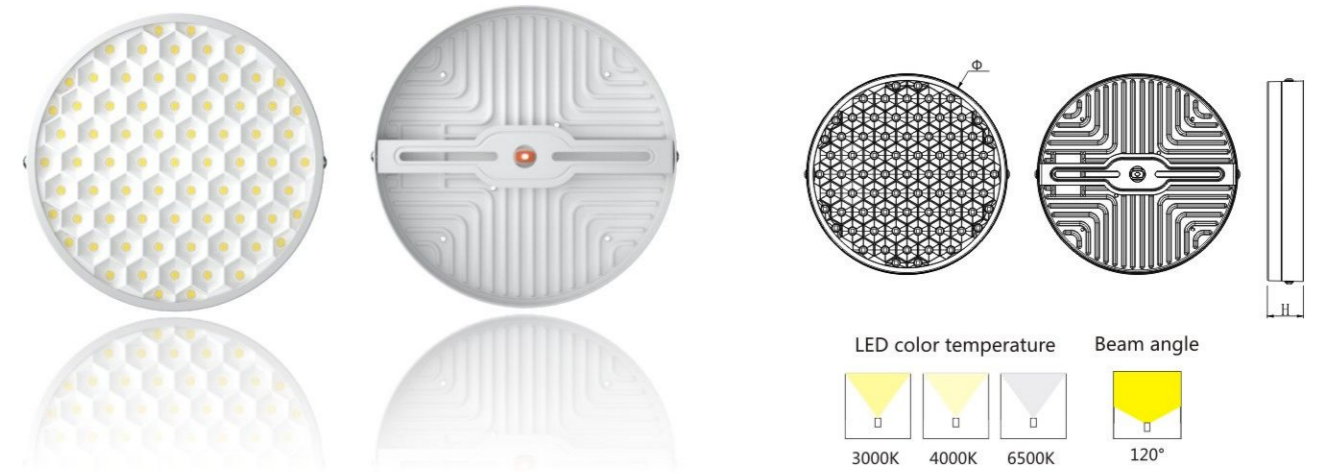

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLBSR-15	15W	Φ120*30	70/80	3000K/4000K/6500K	SMD2835*55	100	0.5/0.9	AC85-265V(AC175-265V)
XLBSR-22	22W	Φ170*30	70/80	3000K/4000K/6500K	SMD2835*73	100	0.5/0.9	AC85-265V(AC175-265V)
XLBSR-32	32W	Φ225*30	70/80	3000K/4000K/6500K	SMD2835*109	100	0.5/0.9	AC85-265V(AC175-265V)

SQUARE

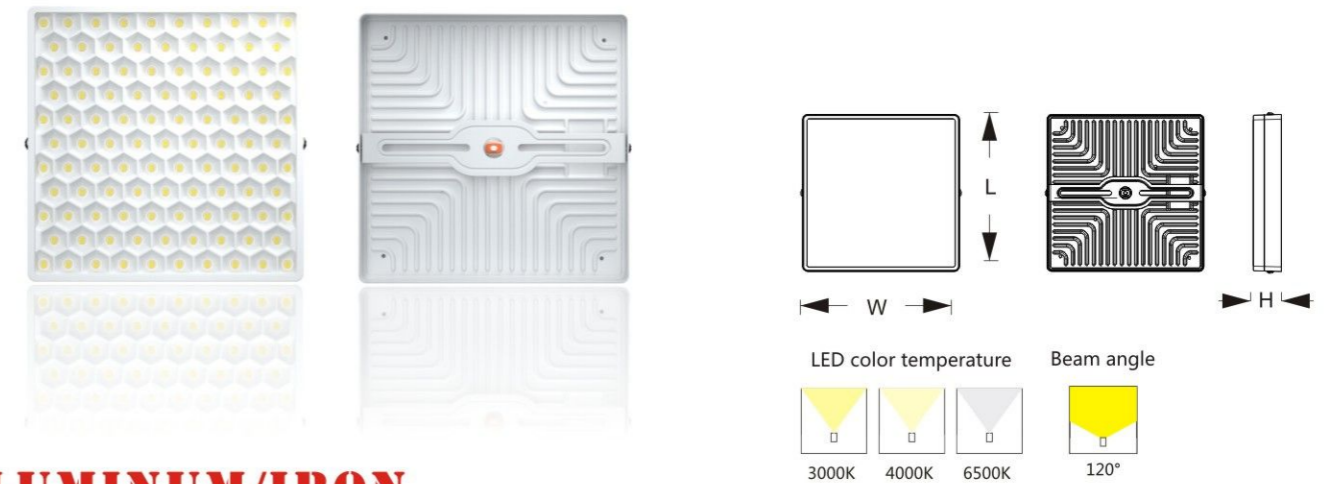

ALUMINUM/IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLBSS-22	22W	170*170*30	70/80	3000K/4000K/6500K	SMD2835*73	100	0.5/0.9	AC85-265V(AC175-265V)
XLBSS-23	32W	225*225*30	70/80	3000K/4000K/6500K	SMD2835*109	100	0.5/0.9	AC85-265V(AC175-265V)

Zeus II
Smart Panel Light

APP Control

All Brightness

Colors Adjustable


Powered by **tuya**
Intelligence Inside

Optional

CB CE ENEC RoHS ISO 9001 SAS ENEC LVD

ROUND
10W/15W/22W/32W

ALUMINUM

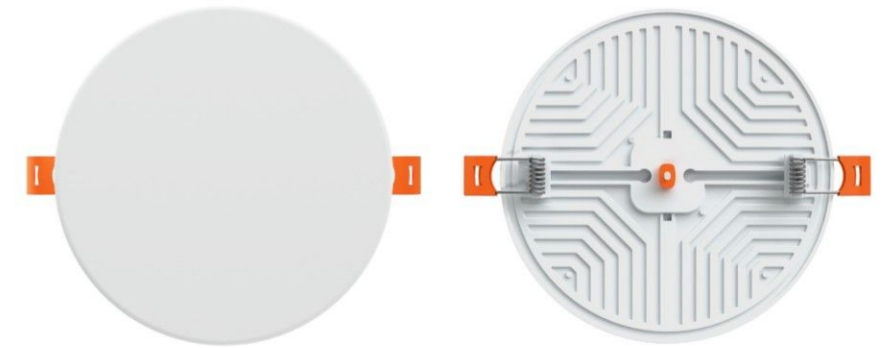


TUYA


**SMART
PANEL
LIGHT**

SQUARE
10W/15W/22W/32W

ALUMINUM

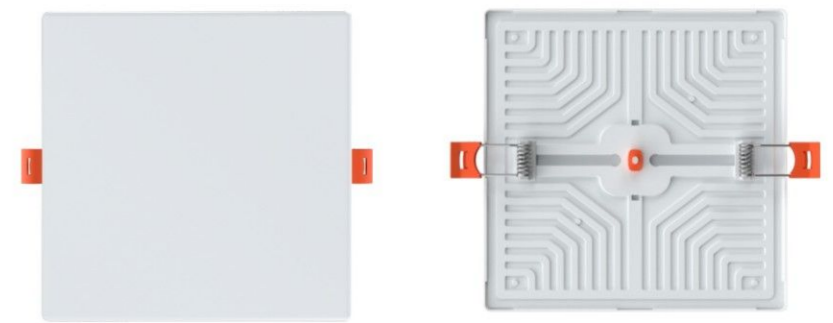


Recessed

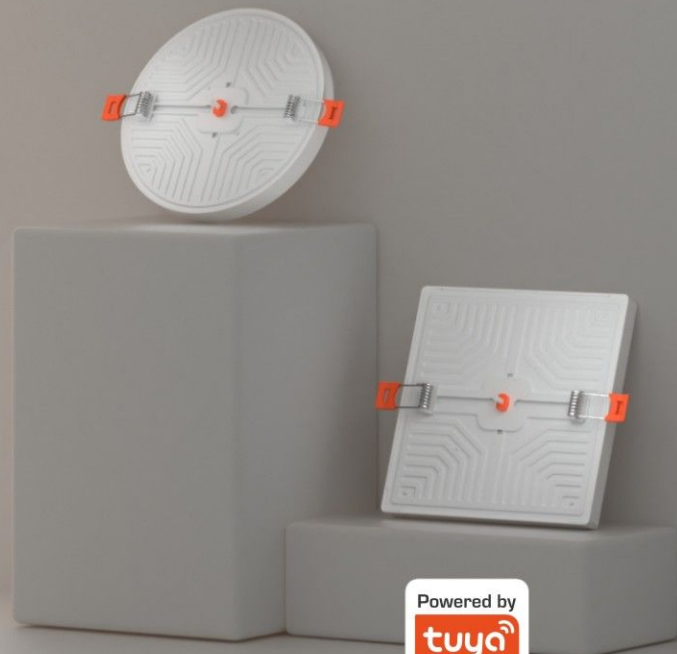

Optional




TUYA

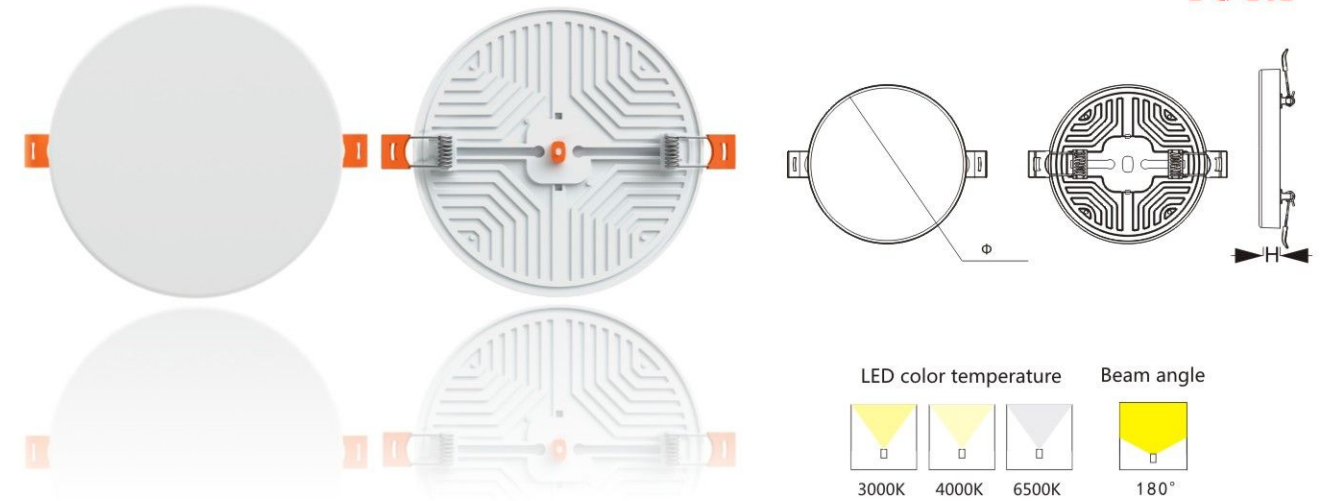

ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLTYR-10	10W	Φ100*16	70/80	3000K/4000K/6500K	SMD2835*120	50-70	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYR-15	15W	Φ120*16	70/80	3000K/4000K/6500K	SMD2835*168	50-90	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYR-22	22W	Φ170*18	70/80	3000K/4000K/6500K	SMD2835*288	50-135	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYR-32	32W	Φ220*18	70/80	3000K/4000K/6500K	SMD2835*506	50-185	100	0.5/0.9	AC85-265V(AC175-265V)

TUYA

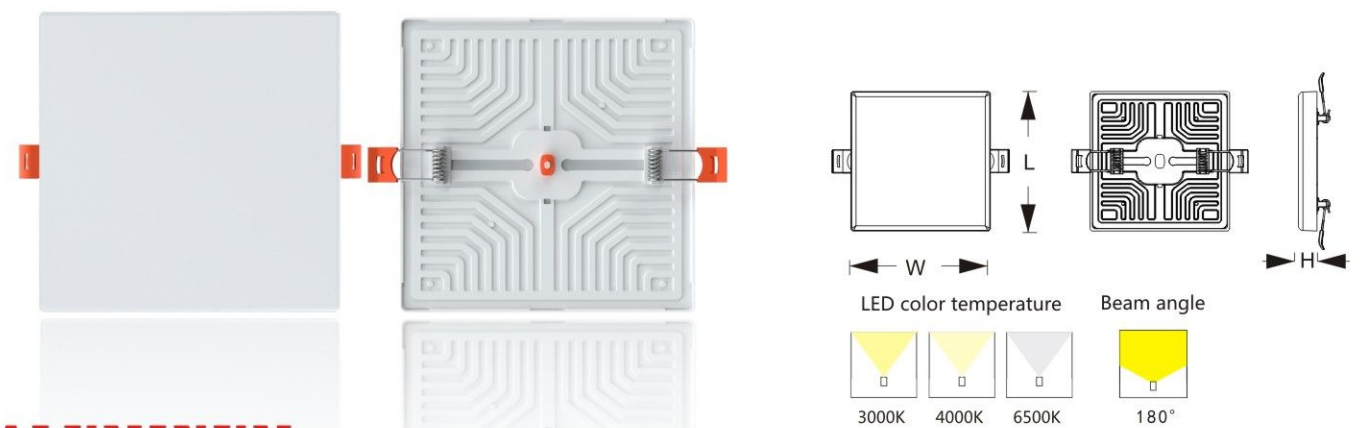


ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLTYS-10	10W	100*100*16	70/80	3000K/4000K/6500K	SMD2835*132	50-70	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYS-15	15W	120*120*16	70/80	3000K/4000K/6500K	SMD2835*168	50-90	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYS-22	22W	170*170*18	70/80	3000K/4000K/6500K	SMD2835*336	50-135	100	0.5/0.9	AC85-265V(AC175-265V)
XLTYS-32	32W	220*220*18	70/80	3000K/4000K/6500K	SMD2835*506	50-185	100	0.5/0.9	AC85-265V(AC175-265V)



IP44

ROUND

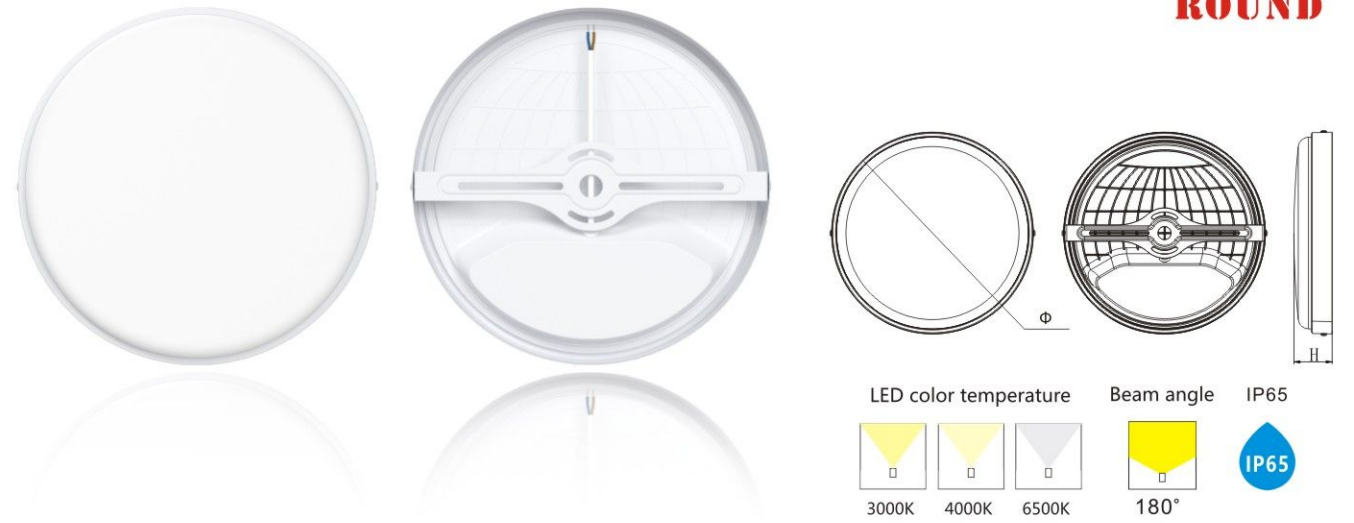

IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLMPR-24	24W	Φ175*35	70/80	3000K/4000K/6500K	SMD2835*96	100	0.5/0.9	AC85-265V(AC175-265V)
XLMPR-36	36W	Φ235*35	70/80	3000K/4000K/6500K	SMD2835*144	100	0.5/0.9	AC85-265V(AC175-265V)

OVAL



IRON

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLMP0-18	18W	200*100*35	70/80	3000K/4000K/6500K	SMD2835*96	100	0.5/0.9	AC85-265V(AC175-265V)
XLMP0-30	30W	260*130*35	70/80	3000K/4000K/6500K	SMD2835*144	100	0.5/0.9	AC85-265V(AC175-265V)



Beam angle



60°

LED color temperature



3000K 4000K 6500K

ALUMINUM


MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLHIC-7	7W	Φ90*45	80	3000K/4000K/6500K	COB/Ø11	Φ75	100	0.5/0.9	AC85-265V(AC175-265V)
XLHIC-10	10W	Φ130*50	80	3000K/4000K/6500K	COB/Ø11	Φ95	100	0.5/0.9	AC85-265V(AC175-265V)
XLHIC-15	15W	Φ170*50	80	3000K/4000K/6500K	COB/Ø17	Φ135	100	0.5/0.9	AC85-265V(AC175-265V)
XLHIC-30	30W	Φ225*50	80	3000K/4000K/6500K	COB/Ø23	Φ185	100	0.5/0.9	AC85-265V(AC175-265V)



Extreme Surface Panel Light



XLES

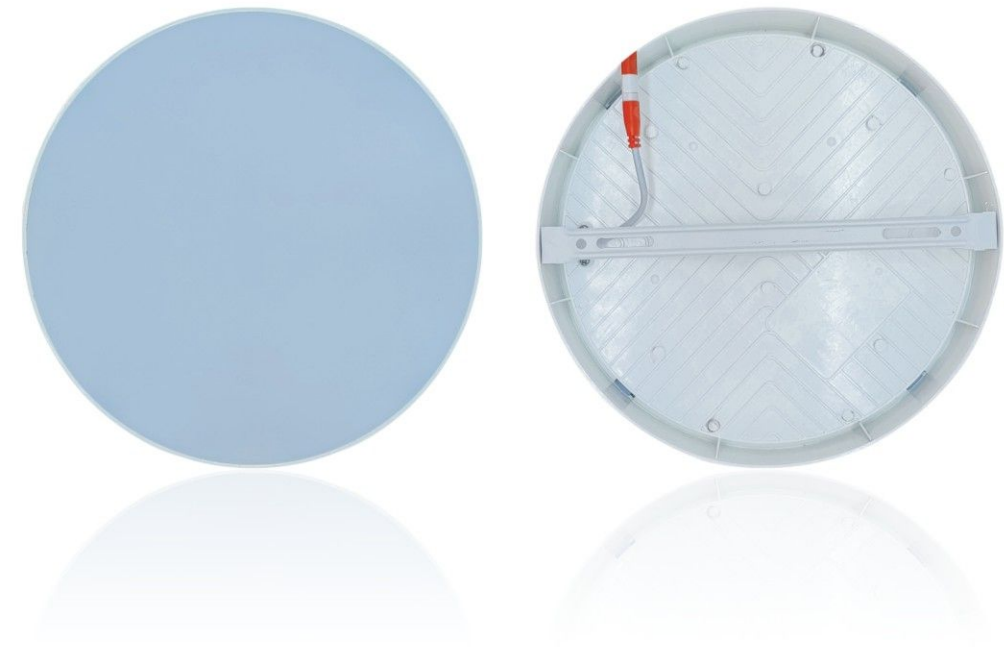

PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLES-18	18W	Φ120*40	70	WW/NW/PW	SMD2835*90	90	0.5	AC85-265V(AC175-265V)
XLES-24	24W	Φ170*40	70	WW/NW/PW	SMD2835*168	90	0.5	AC85-265V(AC175-265V)
XLES-36	36W	Φ225*40	70	WW/NW/PW	SMD2835*252	90	0.5	AC85-265V(AC175-265V)
XLES-48	48W	Φ300*40	70	WW/NW/PW	SMD2835*500	90	0.5	AC85-265V(AC175-265V)

XLPTP



PLASTIC

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLPTP-18	18W	Φ230*25	80	WW/NW/PW	SMD2835*81	85	0.5	AC185-265V
XLPTP-24	24W	Φ300*25	80	WW/NW/PW	SMD2835*108	85	0.5	AC185-265V
XLPTP-30	30W	Φ400*25	80	WW/NW/PW	SMD2835*140	85	0.5	AC185-265V
XLPTP-40	40W	Φ500*27	80	WW/NW/PW	SMD2835*180	85	0.5	AC185-265V
XLPTP-50	50W	Φ600*27	80	WW/NW/PW	SMD2835*208	85	0.5	AC185-265V
XLPTP-70	70W	Φ750*27	80	WW/NW/PW	SMD2835*280	85	0.5	AC185-265V

Plastic
Tri-proof light



In-inclined Downlight




XLDR



ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLDR-7	7W	Φ100*20	70	WW/NW/PW	SMD2835*35	Φ75	80	0.5	AC85-265V(AC175-265V)
XLDR-12	12W	Φ120*20	70	WW/NW/PW	SMD2835*60	Φ105	80	0.5	AC85-265V(AC175-265V)
XLDR-15	15W	Φ140*20	70	WW/NW/PW	SMD2835*75	Φ120	80	0.5	AC85-265V(AC175-265V)
XLDR-20	20W	Φ170*20	70	WW/NW/PW	SMD2835*100	Φ140	80	0.5	AC85-265V(AC175-265V)
XLDR-24	24W	Φ220*30	70	WW/NW/PW	SMD2835*150	Φ190	80	0.5	AC85-265V(AC175-265V)

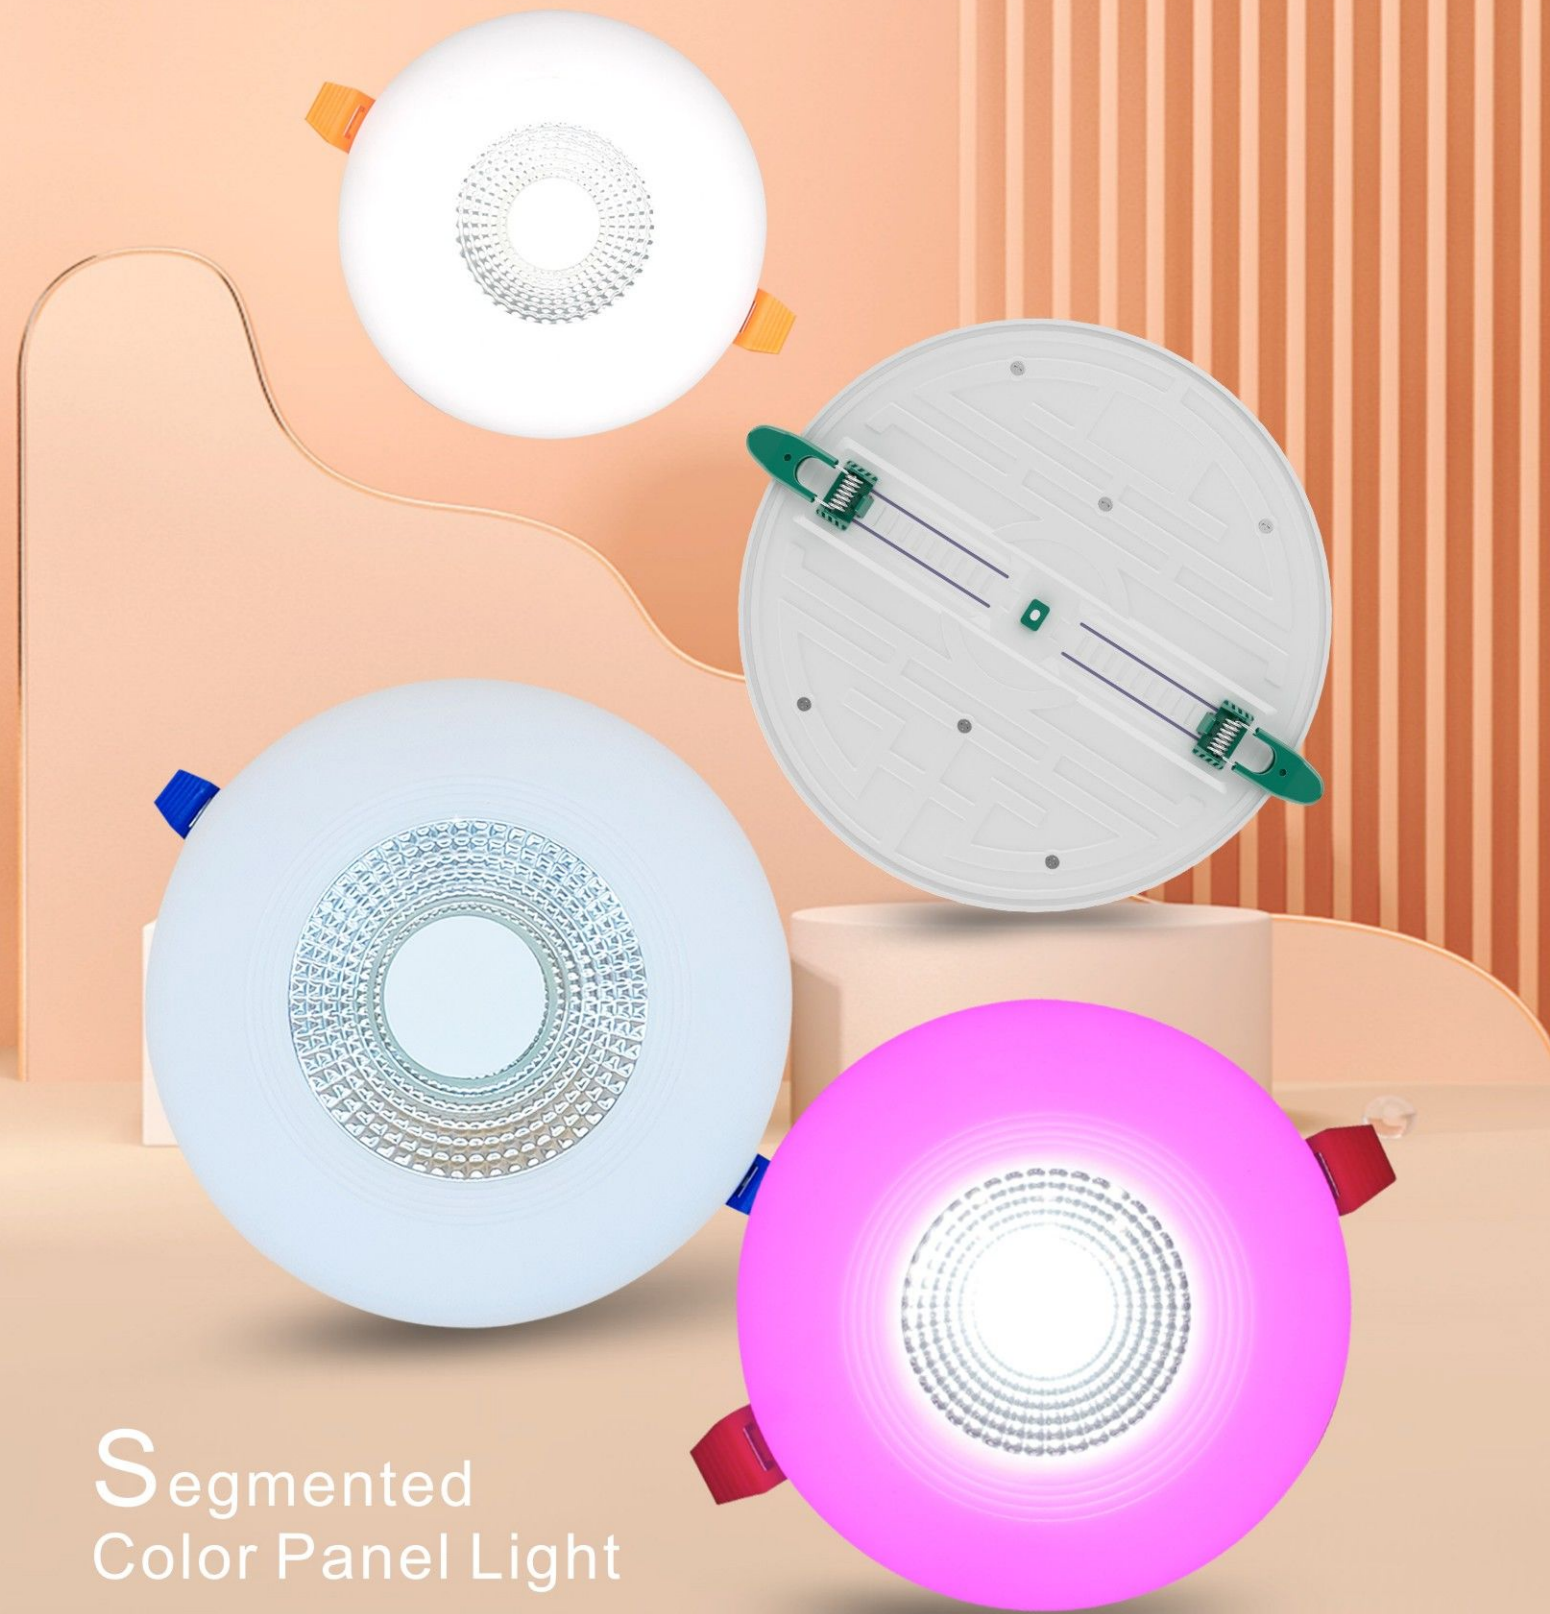

Segmented
Color Panel Light



ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLCG6+6	6+6W	Φ100*18	70	SMD2835*42	Φ50-70	90	0.5	AC85-265V(AC175-265V)
XLCG12+12	12+12W	Φ120*18	70	SMD2835*84	Φ50-90	90	0.5	AC85-265V(AC175-265V)
XLCG24+24	24+24W	Φ170*18	70	SMD2835*144	Φ50-135	90	0.5	AC85-265V(AC175-265V)
XLCG36+36	36+36W	Φ220*18	70	SMD2835*216	Φ50-185	90	0.5	AC85-265V(AC175-265V)

Color Rim Panel Light



XLCR



ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLCR-9	9W	Φ90*18	70	SMD2835*45	Φ50-70	90	0.5	AC85-265V(AC175-265V)
XLCR-18	18W	Φ120*18	70	SMD2835*108	Φ50-90	90	0.5	AC85-265V(AC175-265V)
XLCR-24	24W	Φ170*18	70	SMD2835*168	Φ50-140	90	0.5	AC85-265V(AC175-265V)
XLCR-36	36W	Φ220*20	70	SMD2835*252	Φ50-190	90	0.5	AC85-265V(AC175-265V)

Color Rim Surface Panel Light

XLCSR



ALUMINUM

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLCSR-18	18W	Φ120*47	70	WW/NW/PW	SMD2835*108	100	0.5	AC85-265V(AC175-265V)
XLCSR-24	24W	Φ170*47	70	WW/NW/PW	SMD2835*168	100	0.5	AC85-265V(AC175-265V)
XLCSR-36	36W	Φ220*47	70	WW/NW/PW	SMD2835*252	100	0.5	AC85-265V(AC175-265V)


Deep Downlight



ALUMINUM

ROUND

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSDR-10	10W	Φ115*50	70	3000K/4000K/6500K	SMD2835*60	Φ105	100	0.5	AC85-265V(AC175-265V)
XLSDR-15	15W	Φ145*55	70	3000K/4000K/6500K	SMD2835*90	Φ130	100	0.5	AC85-265V(AC175-265V)
XLSDR-22	22W	Φ170*55	70	3000K/4000K/6500K	SMD2835*120	Φ155	100	0.5	AC85-265V(AC175-265V)

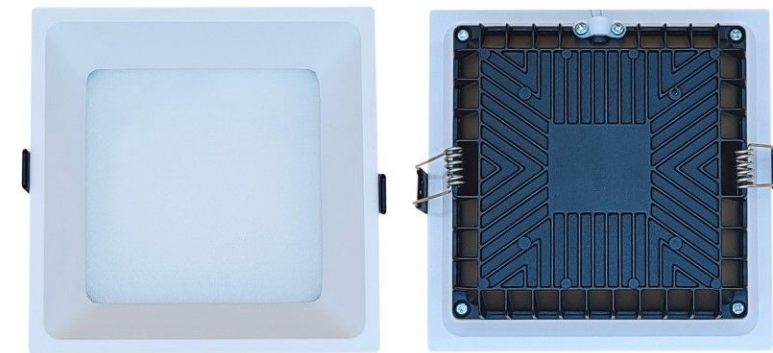

ALUMINUM

SQUARE

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Hole size (mm)	Efficiency (lm/W)	Power Factor	Voltage
XLSDS-10	10W	110*110*50	70	3000K/4000K/6500K	SMD2835*60	100	100	0.5	AC85-265V(AC175-265V)
XLSDS-15	15W	145*145*55	70	3000K/4000K/6500K	SMD2835*90	130	100	0.5	AC85-265V(AC175-265V)
XLSDS-22	22W	170*170*55	70	3000K/4000K/6500K	SMD2835*120	155	100	0.5	AC85-265V(AC175-265V)

Surface Frameless Panel Light



ALUMINUM

ROUND

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLRPR-18	18W	Φ120*40	70	3000K/4000K/6500K	SMD2835*96	100	0.5	AC85-265V(AC175-265V)
XLRPR-24	24W	Φ170*40	70	3000K/4000K/6500K	SMD2835*144	100	0.5	AC85-265V(AC175-265V)
XLRPR-36	36W	Φ225*40	70	3000K/4000K/6500K	SMD2835*255	100	0.5	AC85-265V(AC175-265V)
XLRPR-48	48W	Φ300*40	70	3000K/4000K/6500K	SMD2835*288	100	0.5	AC85-265V(AC175-265V)




ALUMINUM

SQUARE

MODEL	Wattage (W)	Size (mm)	CRI	CCT	LED	Efficiency (lm/W)	Power Factor	Voltage
XLRPS-18	18W	120*120*40	70	3000K/4000K/6500K	SMD2835*96	100	0.5	AC85-265V(AC175-265V)
XLRPS-24	24W	170*170*40	70	3000K/4000K/6500K	SMD2835*168	100	0.5	AC85-265V(AC175-265V)
XLRPS-36	36W	225*225*40	70	3000K/4000K/6500K	SMD2835*289	100	0.5	AC85-265V(AC175-265V)
XLRPS-48	48W	300*300*40	70	3000K/4000K/6500K	SMD2835*366	100	0.5	AC85-265V(AC175-265V)

RECESSED

COB DOWN LIGHT



IRON



XLDDC

CRI: 80
 CCT: WW / NW / PW
 Efficiency(lm/W): 90
 Power Factor: 0.5
 Voltage: AC175-265V

● Reflectors available in various colors




MODEL	Wattage(W)	Size(mm)	Luminous surface	Hole Size
XLDDC-7	7	Φ100*40	Φ18	Φ75
XLDDC-12	12	Φ120*45	Φ23	Φ95
XLDDC-22	22	Φ170*50	Φ42	Φ130
XLDDC-30	30	Φ230*65	Φ60	Φ190

SMD DOWN LIGHT



RECESSED



IRON



XLDDS

CRI: 80
CCT: WW / NW / PW
Efficiency(lm/W): 90
Power Factor: 0.5
Volatge: AC85-265V

● Reflectors available in various colors




MODEL	Wattage(W)	Size(mm)	LED	Hole Size
XLDDS-7	7	Φ100*40	LED*10	Φ75-80
XLDDS-12	12	Φ120*45	LED*15	Φ95-100
XLDDS-22	22	Φ170*50	LED*28	Φ130-140
XLDDS-30	30	Φ230*65	LED*40	Φ190-200

STRAIGHT



COB / SMD
DOWN LIGHT



IRON



XLSDL

CRI: 80
CCT: WW / NW / PW
Efficiency(lm/W): 100
Power Factor: 0.5
Voltage: AC175-265V

• Reflectors available in various colors




MODEL	Wattage(W)	Size(mm)	Luminous surface	LED
XLSDL-12(COB)	12	Φ105*80	Φ18	LED*20
XLSDL-22(COB)	22	Φ145*90	Φ23	LED*30
XLSDL-12(SMD)	12	Φ105*80	/	LED*10
XLSDL-22(SMD)	22	Φ145*90	/	LED*15

COB / SMD DOWN LIGHT



SURFACE



IRON



XLSDF

CRI: 80
CCT: WW / NW / PW
Efficiency(lm/W): 100
Power Factor: 0.5
Volatge: AC175-265V

● Reflectors available in various colors



MODEL	Wattage(W)	Size(mm)	Luminous surface	LED
XLSDF-24(COB)	24	Φ170*55	Φ42	LED*60
XLSDF-30(COB)	30	Φ230*68	Φ60	LED*80
XLSDF-24(SMD)	24	Φ170*55	/	LED*28
XLSDF-30(SMD)	30	Φ230*68	/	LED*40